AD-A136 799 A LAYERED COMMUNICATION SYSTEM FOR ETHERNET(U) NAVAL POSTGRADUATE SCHOOL MONTEREY CA M D STOTZER SEP 83 1/2

UNCLASSIFIED F/G 17/2 NL

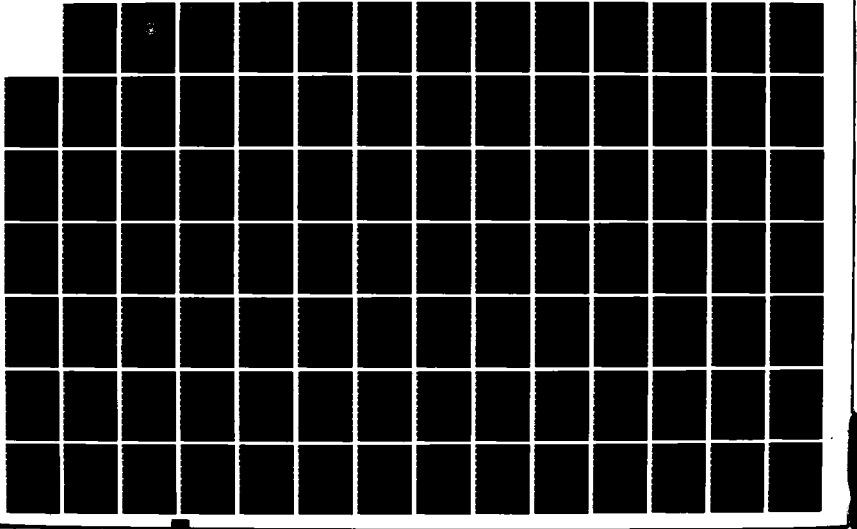



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

NAVAL POSTGRADUATE SCHOOL
Monterey, California

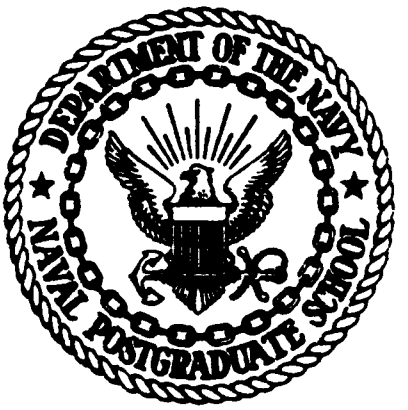

A136799

JAN 13 1984
H

THESIS

A LAYERED COMMUNICATION SYSTEM FOR ETHERNET

by

Mark D. Stotzer

September 1983

Thesis Advisor: U. R. Kodres

DTIC FILE COPY

Approved for public release, distribution unlimited

84 01

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO. A136799	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) A Layered Communication System for Ethernet		5. TYPE OF REPORT & PERIOD COVERED Master's Thesis; September 1983 6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Mark D. Stotzer		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Postgraduate School Monterey, California 93943		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Postgraduate School Monterey, California 93943		12. REPORT DATE September 1983 13. NUMBER OF PAGES 99
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release, distribution unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Ethernet; Local Area Network; ISO OSI Model

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

Connecting heterogenous computer systems via local area networks presents a challenge to software designers for the development of effective, reliable, and modifiable network communication software.

This thesis presents a set of hierarchical program modules written for use on any INTELLEC MDS microcomputer development system, running the CP/M-80 operating system, to allow the

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

S/N 0102-LF-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

system to become part of an Ethernet local area network. These program modules were written to not only obey the principles of software engineering, but to also reflect the same functional hierarchy as the International Standards Organization Open System Interconnection (ISO OSI) architectural reference model for computer networks.

Accession For
NTIS GRA&I
DTIC TAB
Unannounced
Justification
By
Distribution/
Availability Codes
Dist | Avail and/or Special
A-1

DTIC COPY INSPECTED 2

Approved for Public Release; Distribution Unlimited

A Layered Communication System for Ethernet

by

Mark D. Stotzer
Captain, United States Marine Corps
B.S., University of Louisville, 1977

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN ELECTRICAL ENGINEERING

from the

NAVAL POSTGRADUATE SCHOOL
September 1983

Author: Mark D. Stotzer

Approved by: Uno R. Kodres
Thesis Advisor

Mitchell L. Cotton
Second Reader

Robert D. Strum
Chairman, Department of Electrical Engineering

J. N. Dyer
Dean of Science and Engineering

ABSTRACT

Connecting heterogenous computer systems via local area networks presents a challenge to software designers for the development of effective, reliable, and modifiable network communication software.

This thesis presents a set of hierarchical program modules written for use on any INTELLEC MDS microcomputer development system, running the CP/M-80 operating system, to allow the system to become part of an Ethernet local area network. These program modules were written to not only obey the principles of software engineering, but to also reflect the same functional hierarchy as the International Standards Organization Open System Interconnection (ISO OSI) architectural reference model for computer networks.

TABLE OF CONTENTS

LIST OF TABLES

LIST OF FIGURES

ACKNOWLEDGEMENTS

To my wife, Jan, goes special thanks for her unlimited patience and for our new son, Mark Andrew.

Additionally, an expression of thanks to Mr. Mike Williams, Computer Science Professional Staff, for his expert advice and assistance throughout this project.

I. INTRODUCTION

A. DISCLAIMER

Many terms used in this thesis are registered trademarks of commercial products. Rather than attempt to cite each individual occurrence of a trademark, all registered trade marks appearing in this thesis are listed below following the firm holding the trademark:

Digital Research Incorporated, Pacific Grove, California

CP/M-80 Operating System

CP/M-86 Operating System

PL/I-80 Programming Language

PL/I-86 Programming Language

LINK-80 Linking Utility

XLT-86 Code Conversion Utility

Intel Corporation, Santa Clara, California

INTELLEC MDS Microcomputer Development System

Multibus Bus Architecture

8080/8086 Microprocessors

8080 Assembly Language Programming Language

ISIS-II Operating System

IAPX-432 Development System

Digital Equipment Corporation, Maynard, Massachusetts

VAX 11/780 Minicomputer

VAX/VMS Operating System

Interlan Corporation, Chelmsford, Massachusetts

NI3010 Ethernet Controller Board

Xerox Corporation, Stamford, Connecticut

Ethernet Local Area Network

B. BACKGROUND

The connection of heterogeneous computer systems via some form of network, to perform various data processing tasks where data or resource sharing is important, is an extremely active topic for both hardware and software designers.

The International Standards Organization Open System Interconnection (ISO OSI) architectural reference model provides the general framework in which computer network systems are designed to operate. This seven-layered, hierarchical description of functions was developed to provide a vehicle for the later development of a set of specific network protocols. The hierarchical nature of this model compares favorably with the techniques of hierarchical, structured design of software that are being taught and implemented today. The logical conclusion of the above comparison is to use the functionally layered framework provided by the ISO OSI model as a guide for deciding how to modularize the communication software necessary to allow host computers to be connected via a network.

C. PURPOSE

The main purpose of this thesis is to construct a software interface to the CP/M-80 operating system so that files and messages can be transported between various host systems via a Local Area Network. The structuring of this software, to reflect the layers of the ISO model, allows modifications to the network software to be more easily made.

This thesis presents a set of PL/I-80 and Intel 8080 Assembly Language modules that, when linked together, allow INTELLEC MDS users to communicate via an Ethernet Local Area Network. The complete set of software developed also includes two programs that can be used to troubleshoot or test the Ethernet hardware. The communication program allows INTELLEC MDS computers connected to the network to:

1. Send messages or files to other hosts.
2. Receive messages or files from other hosts.
3. Become a terminal of the VAX 11/780.
4. Command file transfers to or from the VAX.

Additionally, the communication software will provide faster data transfers between host machines than the direct host-to-host serial communications methods currently used.

This thesis is divided into four chapters. Chapter II discusses computer networks in general. The Ethernet is presented as a specific example of a Local Area Network. The Interlan hardware is also discussed as an implementation of the Ethernet. Chapter III deals with the details of the

Ethernet communications software. The topological, hardware, software and performance issues are presented in detail. Chapter IV presents the conclusions drawn from the network realization and discusses possible areas of future growth and performance enhancement.

II. COMPUTER NETWORKS

A. DEFINITION

Computer networks are defined to be collections of interconnected, autonomous computers. A computer network can also be a grouping in which the required processing functions are dispersed among several of the attached hosts. [Ref. 1: p. 2]

Computer networks are classified by their length. Networks whose attached hosts are farther than a few kilometers apart are considered Long Haul, while shorter networks are considered Local Area. Networks are also classified by the nature of the hosts connected to them. Homogeneous networks consist of like hosts, while heterogeneous networks consist of dissimilar hosts.

B. PURPOSE

The main reason that the subject of computer networking has rapidly achieved prominence is that networking provides a workable solution to data processing problems where the sharing of data or other resources is important. Networking can also enhance the fault tolerance of an activity's computational assets. Loss of any host, connected to most Local Area networks, would not affect either the other hosts or the network itself. [Ref. 1: pp. 3-4]

Current trends seem to point to the merging of personal computers with Local Networking to form what one author calls "community microcomputing" [Ref. 2: p. 60]. This refers to the interconnection, via a Local Area Network, of a set of microcomputers that may, as a networked group, enhance the price/performance ratio for the using activity when compared to installing a single, large mainframe computer [Ref. 1: p. 5].

C. THEORY

The most generally accepted model of computer network architecture is the International Standards Organization Open Systems Interconnection Model (ISO OSI) model. This model is a set of hierarchical functions and protocols that are necessary to allow computers to communicate via a network. The seven layers and their definitions are listed below: [Ref. 1: pp. 15-21]

1. Physical Layer - This layer provides the actual connection between hosts. It provides the bit stream transmission across the network medium.

2. Data Link Layer - This layer performs error detection and correction, address recognition and flow control. This layer also provides data framing if necessary.

3. Network Layer - The network layer provides logical channels between two endpoints in a network. This layer forms the data into packets for transmission.

4. Transport Layer - The transport layer provides the network with single, group, or broadcast addressing modes and sets up virtual circuits between hosts.

5. Session Layer - This layer contains the functions necessary to perform address conversion. This layer

initiates, binds, and terminates the dialogue between hosts.

6. Presentation Layer - The presentation layer is mainly concerned with converting and transforming the data passed to a user. This layer also contains the file transfer and virtual protocols.

7. Application Layer - The application layer, the highest in the model, is where the user interface to all the network services resides. The lower layers exist only to support this layer.

Many computer networks with layered protocols exist, but their layers may not match the ISO model exactly because some of the ISO functions may not be necessary. The development of the model came about due to the need to standardize network description. The main factors that motivated the designers were: [Ref. 1: p. 15]

1. To create a layer where abstraction was necessary.

2. To give each layer a well defined function.

3. To keep the information passed between layers to a minimum.

4. To create only a minimum number of layers to decrease complexity.

The above design principles are the same as the software engineering principles of abstraction and modularity. The hierarchical structure also compares favorably with the structured programming techniques of software design that are currently being advocated. [Ref. 4: pp. 58-60]

The ISO OSI model is shown in Figure 2.1. The main concepts of the model are: [Ref. 8: pp. 28-29]

1. Each layer only interacts with the vertically adjacent layers through well defined interfaces.

Changes to any layer can thus be accomplished without changing the other layers.

2. Two basic protocols exist per layer. The first is the vertical protocol between layers. The second is the horizontal or peer protocol between transmitting and receiving layers of different hosts that allows virtual communication to occur between those hosts.

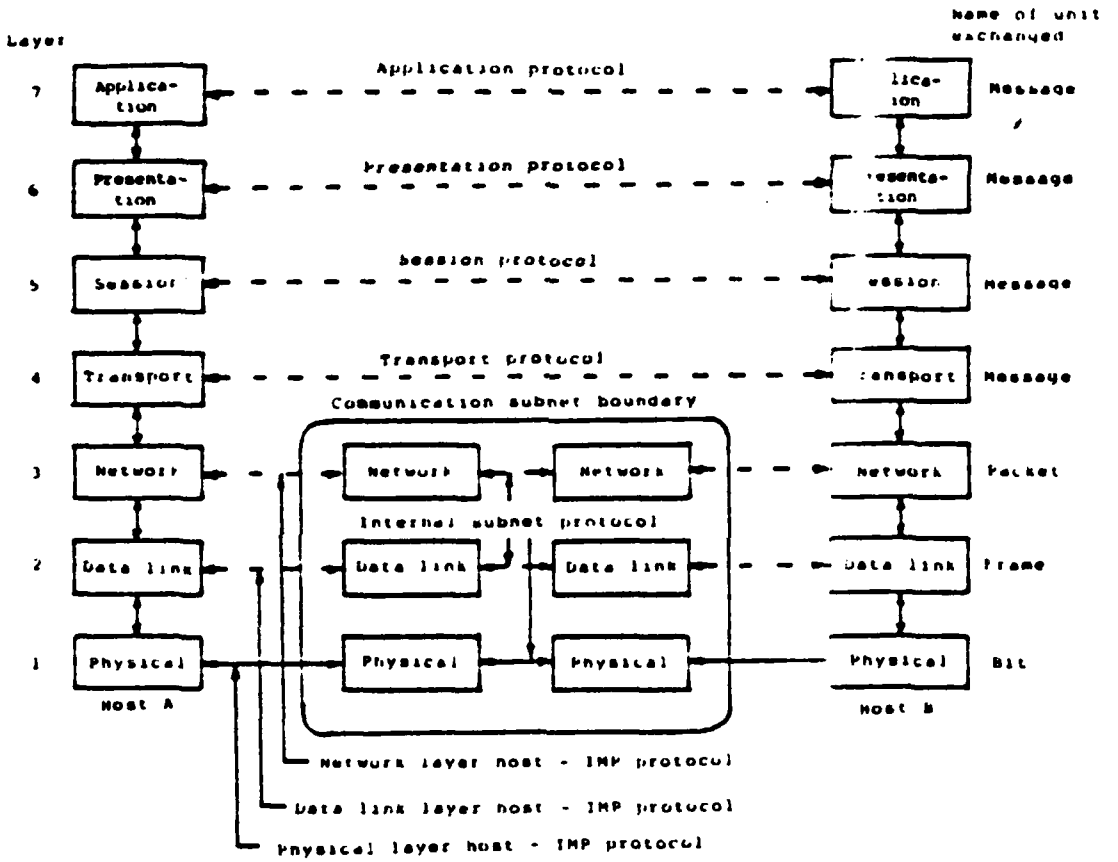

Figure 2.1 ISO Reference Model

The flow of data in the network model begins at the top layer of the sending host. As the data is passed down the sending host's layers additional information, either bits or bytes, is added to the original data until the lowest layer

is reached. At the lowest layer, the data and added information is sent on the network medium. The receiving host then performs the reverse process on the received information by passing it up the ISO layers until all that remains, after again reaching the top layer, is the original data.

D. LOCAL AREA NETWORKS

Computer networks, as previously mentioned, are classified as either Long Haul or Local Area. Local Area networks are characterized by: [Ref. 1: p. 286]

1. A length of no greater than a few kilometers.
2. A data rate in excess of one million bits per second (1 Mbps).
3. Ownership by a single organization.

Two techniques of transmission medium access are being considered for standardization by the Institute of Electrical and Electronic Engineers (IEEE). The proposed IEEE Standard 802 endorses both the token passing and carrier sense methods of Local Area Network medium access. Token passing consists of not allowing any host on the local network to transmit on the medium unless it has possession of a token that is passed in a predetermined order from one host to another. The carrier sense method allows each host equal access to the network. This scheme allows each host to detect the occurrence of any other transmissions on the network and allows the host to wait until the medium is

clear before transmitting. If two hosts try to transmit simultaneously, they will each detect the collision and wait an independent, random interval before attempting another transmission. Ethernet is an example of a carrier sense network. [Ref. 5: p. 31]

E. ETHERNET

Specific details of Ethernet Standard - Version 1.0 are: [Ref. 6: p. 1]

1. A data rate of 10 Megabits per second (10Mbps).
2. A maximum host separation of 2.5 kilometers.
3. A transmission medium consisting of a shielded coaxial cable.
4. A topology consisting of an unrooted tree.
5. Link control via fully distributed peer protocol with statistical contention resolution.
6. A message protocol of variable size frames.

Additionally, it must be noted that the Ethernet Standard does not provide for either error correction, data encryption, or priority access to the network medium. At any point in time, only one transmission can occupy the medium. [Ref. 6: p. 5]

One current implementation of an Ethernet network is the E-BUS system developed by E-Systems Incorporated. The E-BUS implementation differs from the Ethernet Standard in that it provides for transmitted frames to be acknowledged. The E-BUS also provides multiple coaxial cables to increase both

the effective bandwidth and the overall fault tolerance of the network. [Ref. 10: pp. 77-78]

III. NETWORK IMPLEMENTATION

A. TOPOLOGY

The Ethernet Local Area Network implemented at the Computer Science Department of the Naval Postgraduate School consists of three connected systems:

1. The VAX 11/780 (VMS operating system) minicomputer.
2. An INTELLEC MDS system (CP/M-80 operating system), with attached double density disk drives, that functions as the input/output processor for the Intel IAPX 432 32 bit microcomputer system.
3. A second INTELLEC MDS system with attached single density disk drives. (Also CP/M-80)

This thesis presents the software necessary to allow the above CP/M-80 based systems to communicate via the network. The software necessary to allow the VAX 11/780 the same communication capabilities was written by Lt. Thawip Netniyom [Ref. 9].

B. HARDWARE

All the hardware needed to implement the above network was provided by the Interlan Corporation. The hardware needed to connect each INTELLEC system to the network was installed as follows: [Ref. 7: pp. 7-13]

1. The base port address switches and the priority and interrupt jumpers were set on the NI3010 Ethernet controller board as shown in Figure 3.1.
2. The NI3010 was then inserted into the INTELLEC system in an odd-numbered slot in the Multibus.

3. The NT10 transceiver was installed across the Ethernet coaxial cable and the cabling that connects the NT10 to the NI3010 was connected as shown in Figure 3.2.

The above mentioned hardware provides the ISO layer one and two functions. The Physical Layer functions provided by the transceivers and connecting cables are: [Ref. 7: p. 2]

1. Support of a 10 Mbps data rate.
2. Bit stream generation through Manchester encoding.
3. Media access control.

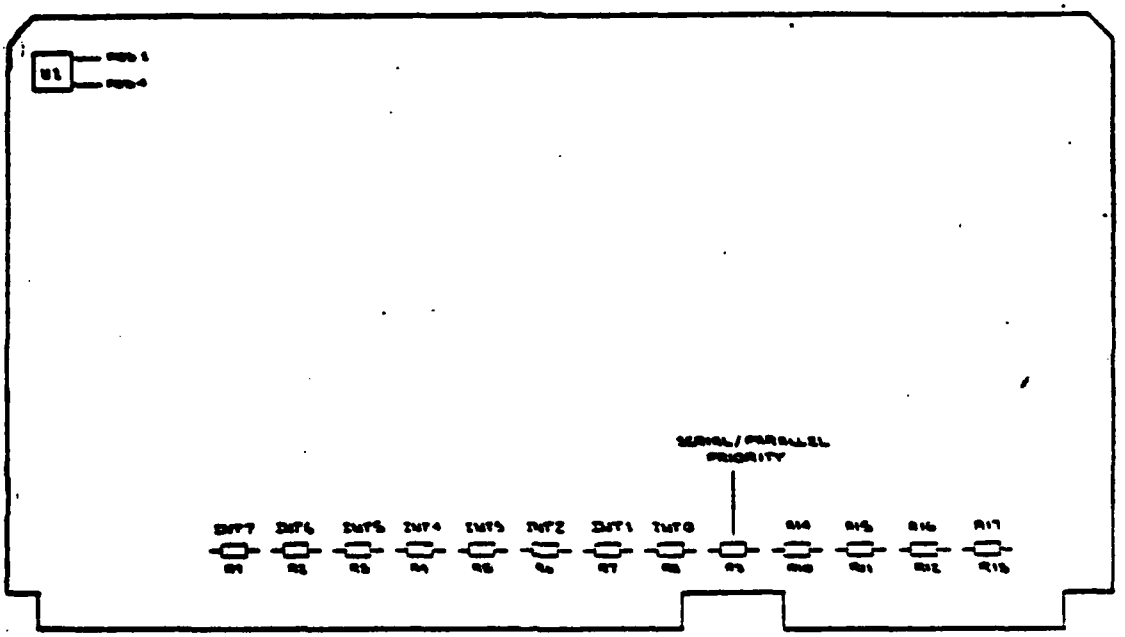

Figure 3.1 NI3010 Switch and Jumper Locations

The Data Link Layer functions provided by the NI3010 board are: [Ref. 7: p. 2]

1. Data encapsulation/decapsulation (framing).
2. Address recognition.
3. Transmit and receive data link management.

The NI3010 operates both as a slave to the host computer and as a master processor when controlling the direct memory access (DMA) operations between the NI3010 buffers and the host computer's memory. The transmit function is command driven by the host, while the receive function is interrupt driven. Control of the NI3010 by the host is accomplished by programming the host to load commands, addresses, byte counts and interrupt enable values into registers onboard the NI3010. [Ref. 7: pp. 69-75]

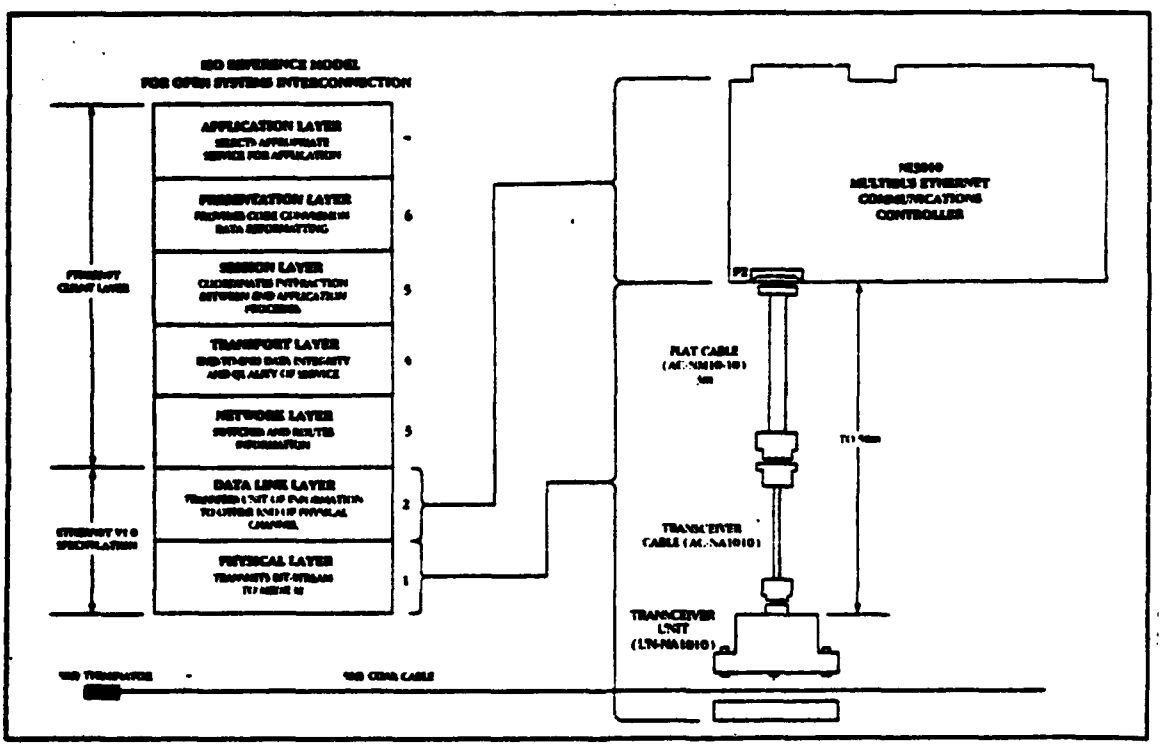

Figure 3.2 Ethernet Architecture and NI3010 Implementation

A complete list of NI3010 commands is located in Appendix A. A table of the NI3010 registers can be found in

Appendix B. After issuance of any command, the host must check for a value in the Command Status Register. The execution of the command only occurs after this read operation has been accomplished. The details of the read operation are as follows: [Ref. 7: pp. 70-72]

1. The host issues a command.
2. The host checks the Interrupt Status Register to check if the least significant bit is a one. If the least significant bit is a one, then the host reads the value in the Command Status Register.
3. If the value in the Command Status Register is a zero then the command executed successfully. After the host has issued a Load, Transmit, and Send command, a value of one is also considered a success. Any other value represents a failure. A listing of Command Status Register values is located in Appendix C.

The Command Status Register must also be read at the beginning of any program written to control the NI3010. This register must be read at this time because the NI3010 automatically performs it's built-in diagnostic routines each time the board is powered up or reset. The automatic testing places a value in the Command Status Register that must be read to clear the register before any other commands can be given to the NI3010.

The NI3010 transmit function is accomplished in the following manner: [Ref. 7: p. 85]

1. The host loads a block of memory in the format shown in Appendix D for each frame to be transmitted.
2. The host loads the three NI3010 address registers with the first address of the host memory block.

3. The host then loads the two NI3010 byte count registers with the number of bytes in the data block.

4. The host then enables a Transmit DMA Done (TDD) interrupt by writing a value of 6 Hex into the Interrupt Enable Register.

5. The NI3010 interrupts the host once the memory block has been transferred into the NI3010 transmit buffer.

6. The host then enables a Receive Block Available (RBA) interrupt by loading the Interrupt Enable Register with a value of 4 Hex. This step allows any pending received frames to be handled.

7. The host then commands the NI3010 to send the frame by writing a value of 29 Hex into the Command Register and subsequently reading the Command Status Register as previously discussed.

The NI3010 receive function is accomplished as shown below: [Ref. 7: p.90]

1. The host enables an RBA interrupt as shown above.

2. The NI3010, upon receiving a frame, interrupts the host to notify it of frame receipt.

3. The host then writes a value of 0 Hex into the Interrupt Enable Register to disable any other NI3010 interrupts.

4. The host writes values into the three NI3010 address registers to inform the NI3010 where, in host memory, to transfer the data.

5. The host then loads the two NI3010 byte count registers.

6. The host then enables the DMA transfer of the data by writing a value of 7 Hex into the Interrupt Enable Register.

7. The NI3010 then interrupts the host upon completion of the transfer. The format of received data in the host memory is shown in Appendix E.

The above steps are repeated for each received frame. The host is then responsible for whatever further operations

must be done with the data. For example, the data could be displayed on the console or written to a disk file.

The NI3010 also has built-in test features and can also support the concepts of broadcast and multicast transmission. Broadcast transmission allows a host to transmit to all other hosts simultaneously, while multicast allows transmission to only a few selected hosts.

C. SOFTWARE

The software necessary to implement ISO layers three through seven was originally written entirely in 8080 Assembly Language. The final version of the communication program consists of PL/I-80 modules that perform the functions of ISO layers six and seven and an Intel 8080 Assembly Language module that performs the functions of ISO layers two and three. The ISO layer two functions performed by the software supplement the functions of this layer performed by the NI3010. The primary goals of the software were:

1. To allow users to run, if necessary, test programs that will verify the functioning of the hardware.
2. To allow the INTELLEC systems to communicate via the Ehternet to any other hosts connected to the network.

1. Test Programs

The basic software design process began by first determining the major functional divisions or modules into which a program should be divided. A primary consideration,

since implementation using the NI3010 is interrupt dependent, was a simple interrupt handling routine. This routine was the basis of the first working test program, ETHTESTA. The interrupt handling module is the basis around which all the succeeding programs were written. ETHTESTA, an 8080 Assembly Language program, commands the NI3010 to perform built-in tests, one of which sends test data to the NI3010 Transmit buffer and back through the NI3010 Receive Data Register. This process is called the NI3010 Module Interface Loopback mode. Use of this test mode does not permit the interrupt handling to be done in the same manner as a normal communication program, nor does this mode allow data to be sent onto the network. The source code listing of ETHTESTA.ASM is located in Appendix F.

A process of gradual enhancement was then applied to upgrade ETHTESTA into a program that utilized the complete interrupt capability as that of a functional communication program. The follow-on test program, ETHTESTB, performs all the tests of ETHTESTA and, additionally, sends a small block of data to itself via the network using the NI3010 Internal Loopback mode. A source code listing of ETHTESTB.ASM can be found in Appendix G.

2. Communication Between Network Hosts

The test programs discussed previously involved the utilization of only one INTELLEC system with installed Ethernet hardware. The next logical step was to again

upgrade the software to allow the INTELLEC systems to communicate via the network.

In order to give hosts, especially of different architectures and operating systems, the ability to communicate via a network involves the development of higher level protocols to handle any differences that may arise due to the above factors. Specifically, differences between hosts related to file storage and frame transmission speed are the kind of issues that must be handled by the use of protocols. In an Ethernet network, the nature of each frame sent onto the network must also be encoded so that the receiving host can determine what further operations must be performed on the received frame data.

The primary operating system file storage mismatch in this network implementation occurred between the VAX/VMS and the CP/M-80 operating systems. The VAX stores text files as variable length records by text sentence. The VAX, also, does not explicitly store the carriage return and line feed characters in the record. On the other hand, the CP/M-80 operating system stores all the characters, including the carriage return and line feed, in one long continuous file. This file storage incompatability was resolved by adding format conversion routines to both the VAX and INTELLEC software to convert the data prior to transmission on the network.

A transmission versus reception speed mismatch was discovered in the early testing between the VAX and the INTELLEC systems. The VAX can send data much faster than the INTELLEC systems can receive it. The solution to this problem was to add a "stop-and-wait" [Ref. 1: pp. 143-145] protocol to the ISO layer two functions already performed by the NI3010. This protocol was implemented in software and assures the sending host that the last frame sent was correctly received. This protocol also prevents a faster sender from inundating a slower receiver.

The frame encoding protocol adopted for our network is as shown in Table 3.1. These codes are written into the two Type Field bytes in the transmit data block as shown in

Table 3.1 Type Field Protocol

Type Field Byte 1	Type Field Byte 2	Interpretation at Receiver
00H	00H	Message frame
00	0F	Last frame of terminal reply
00	FF	Acknowledge frame
0F	00	File transfer-first frame
0F	01	File transfer-middle frame
0F	FF	File transfer-last frame

Appendix D. The receiving hosts interpret these two bytes, once the data block is in their memory as shown in Appendix E, to determine what operations must be done to the data.

The other protocol adopted was to use fixed data block sizes per Ethernet frame. The choices available to the user are:

1. 128 Bytes. (Must be used for all file transfers)
2. 256 Bytes.
3. 512 Bytes.
4. 1024 Bytes.
5. 1500 Bytes. (Used in VAX terminal service mode)

A set of programs, written exclusively in 8080 Assembly Language, was first developed to send short, single sentence messages from one INTELLEC system to another using the above protocols. Next, the file transfer modules were developed and tested. Throughout the entire process, close attention was paid to maintaining software modularity that was analogous to the functional modularity of the ISO model. Software modules that compared directly to ISO layers were maintained as separate modules and, whenever possible, rewritten in PL/I-80, a high level language. The final communication program consists of three PL/I-80 modules and one 8080 Assembly Language module. These modules were linked together, using LINK-80, into the final product. The final program, ETHERNET.COM, contains calling sequences that directly reflect the ISO OSI model structure as shown in Table 3.2. The source code for all modules can be found in Appendices H through Y. Modules were not written for ISO layers four and five because these layers are primarily

concerned with Long Haul network functions that are unneeded by our network. Modules RECEIVE,SENDFRAM,RECFRAM,TRMSG and AWAIT are contained in the assembly language module because the functions they are required to perform are more efficiently programmed in that language. The actual calling sequence for the transmit process occurs as follows:

1. ETHERNET: Asks for user to select type of network service desired and calls SENDATA.
2. SENDATA: Encodes the transmit type field for the user selected service and calls internal routines to control the transmission. This module calls SENDFRAM as each frame is ready for sending.
3. SENDFRAM: This module sends each frame onto the network then calls AWAIT to wait for the acknowledge frame to arrive from the destination host.

Table 3.2 Comparison of Program Modules and the ISO Model

ISO LAYER	Transmit File	Transmit Message	VAX Modes	Receive File	Receive Message
7	ETHERNET.PLI	Same	RECEIVE(ETHER2.ASM)		
6	SENDATA.PLI	Same	RECDATA.PLI		
5	Not Implemented	Same	Not Implemented		
4	Not Implemented	Same	Not Implemented		
3	SENDFRAM(ETHER2)	Same	RECFRAM(ETHER2)		
2	AWAIT(ETHER2)/Hdwe	Same	TRMSG(ETHER2)/Hdwe		
1	NT10 Hardware	Same	Same	Same	

The calling sequence for the receive process is in the order shown below:

1. ETHERNET: The user selects the receive mode of network service and this module calls RECEIVE.

2. RECEIVE: This module waits in a loop for the module RECFRAM to receive a frame from the network. Once the receive data is placed in host memory by RECFRAM, a flag is set and RECEIVE calls RECDATA.

3. RECDATA: This module decodes the type field of the received frame and calls internal modules that handle each different type of received data and, as part of this process, calls TRMSG which send the acknowledge frame back to the source.

The four major functions that the final program performs are:

1. Transmission of files or messages to any other network hosts.

2. Reception of files or messages from any other hosts.

3. The ability to become a terminal of the VAX 11/780 via the Ethernet.

4. The ability to send specially coded messages to the VAX to command it to either upload or download files.

D. OPERATION

The operation of test programs, ETHTESTA and ETHTESTB, consists primarily of invoking either program using normal CP/M-80 procedures and following the directions presented by the program. Detailed instructions for use of the test programs can be found in Appendix L.

Operation of the communication program, ETHERNET, also involves invoking the program using normal CP/M-80 procedures and following the menus presented by the program. Detailed operating instructions for the use of the final communication program are located in Appendix M.

E. PERFORMANCE

The communication program provides faster data transfer between network hosts than currently employed methods. Table 3.3 demonstrates the improved performance realized in transferring data between single and double density INTELLEC systems.

TABLE 3.3 Performance Comparison for Data Transfers Between Single and Double Density INTELLEC Systems

Software Used (CP/M-80)	File Size (KBytes)	Time (Min:Sec)	Data Rate(bps) Medium	Effective
SDXFER	136	22:45	9600	797
ETHERNET	136	3:30	10M	5180

The data rate of the medium is the rate at which data is actually sent on whatever medium is being utilized. The effective data rate is the number of bits of useful data that was sent divided by the total elapsed time of the data transfer. Data transfers between INTELLEC systems were not the only ones that showed a significant improvement over methods that were previously utilized. Transfers of data to and from the VAX 11/780 were also accomplished significantly faster as shown in Table 3.4.

The below presented data shows the improved performance of data transfers when the Ethernet network is employed. Lastly, a series of experiments was performed to investigate

the performance limits of data transmission and reception of the CP/M-80 based programs. The conditions of the

Table 3.4 Performance Comparison of Transfers Between VAX 11/780 and INTELLEC Systems

Software Utilized (VAX to INTELLEC)	File Size (KBytes)	Time (Min:Sec)	Data Rate(bps) Medium	Effective
IAPX 432 Pkg	136	6:40	9600	2720
ETHERNET (To disk file)	136	2:05	10M	8704
ETHERNET (To memory buffer)	136	1:35	10M	11452

experiments were:

1. The stop-and-wait protocol was not employed.
2. The frames would be sent as fast as possible using the minimum amount of 8080 Assembly Language code.
3. The receiver would not perform any extra operations on received data other than that done by the NI3010. No data was either written to any disk files or displayed on the console.
4. Testing was done on data block sizes of 128 and 1500 bytes per ETHERNET frame.

Testing was performed between two INTELLEC systems and and data was collected for both the above data block sizes. The results of the experiments are shown in Table 3.5.

As shown below, the highest data rate achieved was 1.764 Megabits per second. The time taken in each 6.8 millisecond period was accounted for as follows:

1.2 msec Actual Data Transmission of 1500 Bytes

0.5 msec Instruction Execution to Restart Transmit
3.5 msec DMA Operation of 1500 Bytes at 428 KBps rate
1.6 msec Execution Time of NI3010 Send Command

6.8 milliseconds total

Table 3.5 Maximum Performance Data

Data Bytes per Frame	Frame Transmission Interval	Data Rate (Effective)
128	2.7 Milliseconds	379 Kbps
1500	6.8 Milliseconds	1.764 Mbps

The conclusions reached about the Ethernet performance were:

1. The transmission speed is limited by the NI3010 controller itself. The NI3010 Send command required longer to execute than either the actual transmission time of the data or the instruction execution during each transmit cycle.

2. Although the NI3010 literature claims a DMA data rate of 1 MBps, the board could only achieve a rate of 428 KBps. This limitation could be due to the method in which the NI3010 onboard microprocessor is utilized.

IV. CONCLUSIONS

This thesis has shown that functional Local Area Network communication software can be structured according to the ISO OSI network model. This thesis has also shown that the performance of the Ethernet substantially reduces the transfer time of data between connected hosts when compared to methods previously employed. The single to double density transfer rate improved by a factor of 7.5 while the VAX to INTELLEC transfer rate improved by a factor of 3.2. The data also shows that effective data rates can be improved by faster host processors, but that hosts will be limited by the rate at which the NI3010 can transfer data to and from host memory and then send it. INTELLEC hosts are also limited in actual network use by the rate at which data can written to or read from disk drives.

An improvement to the effective data transmission rate might be realized by synchronizing the speed between sending and receiving hosts by some method other than the stop-and-wait protocol utilized in this thesis. The transmission rate performance degradation noted above is only aggravated by using the stop-and-wait protocol.

The software written for this thesis can be adapted to run on an Intel 8086 based system by following the steps listed below:

1. The PL/I-80 source code files can be directly compiled using the PL/I-86 compiler.

2. The 8080 Assembly Language source code can either be hand-translated or translated by software such as the program XLT-86 into 8086 Assembly Language source code. It should be noted that there are differences between the 8080 and 8086 processors that have to do with how interrupts are handled that will require some rewriting of the converted code.

APPENDIX A

NI3010 COMMAND LISTING

Code(Hex)	Command Function	Returned Code(Hex)
01	Set Module Interface Loopback	00
02	Set Internal Loopback	00
03	Clear Loopback	00
04	Set Promiscuous Mode	00
05	Clear Promiscuous Mode	00
06	Set Receive on Error Mode	00
07	Clear Receive on Error Mode	00
08	Go Offline	00
09	Go Online	00
0A	Run Onboard Diagnostics	Diagnostic Codes as shown in Appendix C
18	Report/Reset Statistics	00
19	Report Collision Delays	00
28	Load Transmit Data	00,05
29	Load/Transmit/Send Data	00,01,03,05,06,08,0B
2A	Load Group Addresses	00,05,0A
2B	Delete Group Addresses	00,05,0A
3F	Reset	00

Notes: Promiscuous Mode receives all network traffic.
Receive on Error receives even bad frames.

APPENDIX B

NI3010 REGISTER LISTING

Register	Location
Command	Base Port Address
Status(Command)	Base Port Address+ 01H
Transmit Data	Base Port Address+ 02H
Receive Data	Base Port Address+ 03H
Status(Interrupt)	Base Port Address+ 05H
Interrupt Enable	Base Port Address+ 08H
Extended Bus Address	Base Port Address+ 09H
High Bus Address	Base Port Address+ 0AH
Low Bus Address	Base Port Address+ 0BH
High Byte Count	Base Port Address+ 0CH
Low Bus Address	Base Port Address+ 0DH

Note: The base port address is set on the DIP switch onboard the NI3010.

APPENDIX C

NI3010 STATUS REGISTER CODES

1. Normal Mode:

Code(Hex)	Command Status Result
00	Success
01	Success with Retries
02	Illegal Command
03	Inappropriate Command
04	Failure
05	Buffer Too Large
06	Frame Too Small
08	Excessive Collisions
0A	Buffer Alignment Error

2. Diagnostic Mode:

Code(Hex)	Returned Diagnostic Result
00	Success
01	NM10 Microprocessor Memory Checksum Error
02	NM10 DMA Error
03	Transmitter Error
04	Receiver Error
05	Loopback Failure

APPENDIX D

TRANSMIT DATA FORMAT

	7	0
BAR+ 0	Destination Address A. (Byte 1)	
+ 1	Destination Address B. (Byte 2)	
+ 2	Dest. Addr. C. (Byte 3)	
+ 3	Dest. Addr. D. (Byte 4)	
+ 4	Dest. Addr. E. (Byte 5)	
+ 5	Dest. Addr. F. (Byte 6)	
+ 6	Type Field <7:0> (Byte 1)	
+ 7	Type Field <15:8> (Byte 2)	
+ 8	Data-First Byte	
	. . . .	
BAR+BCR-1	Data-Last Byte	

APPENDIX E

RECEIVE DATA FORMAT

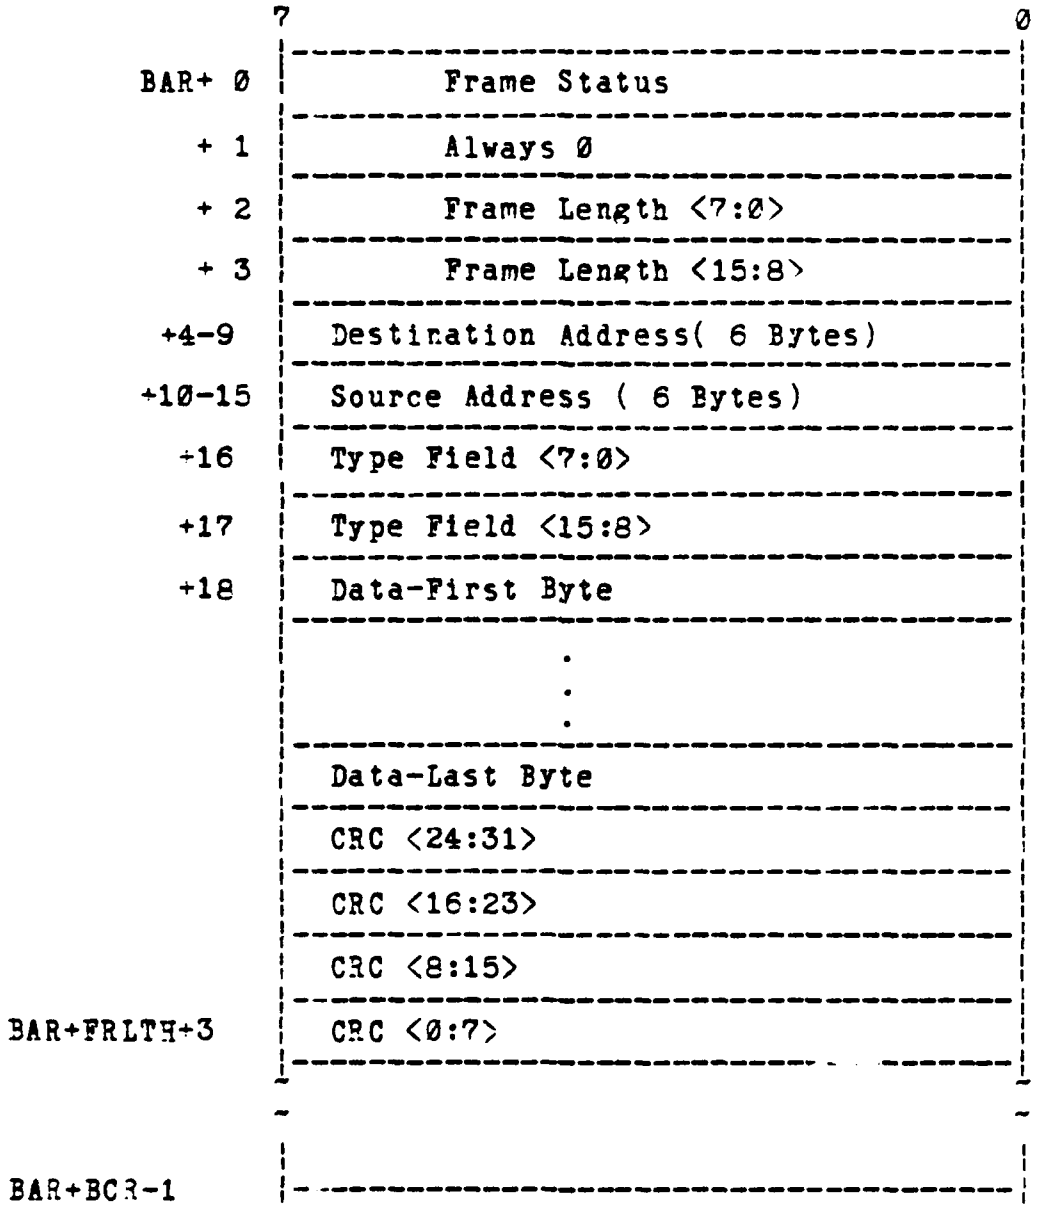

Note: Frame length is counted from first destination address byte up to and including the last CRC byte consecutively.

APPENDIX F

SOURCE CODE OF PROGRAM ETHTESTA.ASM

```
;*****************************************************************
;*****************************************************************
;  ETHERNET LEVEL ONE TEST PROGRAM--VERSION  1.13
;
;PROGRAM FILE NAME: ETHTESTA.COM- INVOKE COMMAND: ETHTESTA
;
;PROGRAM FUNCTION:(RUN ON 8080 BASED MDS SYSTEM)
;COMMANDS THE NI3010 BOARD TO GO ONLINE,PERFORM ITS'
;DIAGNOSTIC TESTS THEN TRANSFERS A 42 BYTE DATA BLOCK FROM
;ADDRESS 0608 HEX TO ADDRESS 0812 HEX VIA THE MODULE INTER-
;FACE LOOPBACK MODE.  TRANSFERRED DATA IS THEN DISLPAYED ON
;THE CONSOLE.  THESE TESTS ONLY REQUIRE THE NI3010 BOARD.
;THE CABLE TO THE TRANSCEIVER NEED NOT BE CONNECTED.
;
;TESTS PERFORMED:
;             1.) ONBOARD DIAGNOSTIC SELF TEST
;             2.) MODULE INTERFACE LOOPBACK TEST-VERIFIES THE
;                 FUNCTION OF THE NI3010 LESS THE RECEIVE
;                 BUFFER.
;
;NI3010 ETHERNET BOARD CONFIGURATION:
;                   1.) JUMPER SET TO INTERRUPT LEVEL 5
;                   2.) BASE PORT ADDRESS SWITCHES SET TO
;                       1011 (00B0H).
;                   3.) PARALLEL PRIORITY TO AN ODD NUMBERED
;                       MULTIBUS SLOT.
;
;ORIGINAL PROGRAM: 03/10/83
;
;LAST REVISION: 04/30/83
;
;WRITER: MARK D. STOTZER
;
;ADVISOR: PROF. U.R. KODRES
;
;*****************************************************************
;*****************************************************************
;MAIN PROGRAM:
            CRG     100H
; NI3010 REGISTER PORT ADDRESSES:
CREG        EQU     00B0F;CMD REG LOCATION
SREG        EQU     00B1H;CMD STATUS REG LOCATION
ISREG       EQU     00B5H;INTERRUPT STATUS REG
```

```
IEREG       EQU     00B8H;INTERRUPT ENABLE REG
EBAR        EQU     00B9H;EXTENDED BASE ADDR REG
HBAR        EQU     00BAH;HIGH BASE ADDR REG
LBAR        EQU     00BBH;LOW BASE ADDR REG
HBREG       EQU     00BCH;HIGH BYTE COUNT REG
LBREG       EQU     00BDH;LOW BYTE COUNT REG
;*****************************************************************
;OTHER NEEDED ADDRESSES:
BDOS        EQU     0005H;BDOS ENTRY POINT
CEREG       EQU     0700H;COPY OF INTERRUPT ENABLE REG
LASTM       EQU     0900H;ADDR OF INIT STACK PTR
;*****************************************************************
;NEEDED BDOS COMMANDS:
CONSIN      EQU     01H;CONSOLE CHAR INPUT
CONSOUT     EQU     02H;CONSOLE CHAR OUTPUT
PSTRING     EQU     09H;PRINT TEXT STRING
;*****************************************************************
;CLEAR COMMAND STATUS REGISTER BY READING
            IN      SREG
;*****************************************************************
;LOAD JUMP INSTRUCTION FOR INTERRUPT HANDLER: (INT 5)
            MVI     A,0C3H;JMP INST CODE
            STA     0028H ;LOAD IT IN ADDR 0028 HEX
            LXI     H,INTHDL
            SHLD    0029H
;*****************************************************************
;OUTPUT INITIAL MESSAGE:
            LXI     D,BMSG
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
;SET UP INTERRUPT CONTROL:
            MVI     A,012H
            OUT     0FDH
            MVI     A,0DFH; ENABLE INTERRUPT 5-ETHERNET BOARD
            OUT     0FCH
;*****************************************************************
;LOAD TRANSMIT DATA BLOCK-FIRST 3 BYTES ASSIGNED BY XEROX:
            MVI     A,02H
            STA     0600H
            MVI     A,07H
            STA     0601H
            MVI     A,01H
            STA     0602H
;LOAD INTERLAN ASSIGNED LAST 3 BYTES HERE:
DESTINP     CALL    CRLF
            LXI     D,DMSG0
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            LXI     D,DMSG1
```

```
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            LXI     D,DMSG2
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            MVI     C,CONSIN;READY FOR CHOICE
            CALL    BDOS
            CPI     31H
            JZ      DADDR2
            CPI     32H
            JZ      DADDR1
            CALL    CRLF
            LXI     D,DMSG3
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            JMP     DESTINP
DADDR1      CALL    CRLF ;IF ADDR 00-03-EA SELECTED LOAD IT:
            MVI     A,00H
            STA     0603H
            MVI     A,03H
            STA     0604H
            MVI     A,0EAH
            STA     0605H
            JMP     ADDIN
DADDR2      CALL    CRLF ;IF ADDR 00-04-0A SELECTED LOAD IT:
            MVI     A,00H
            STA     0603H
            MVI     A,04H
            STA     0604H
            MVI     A,0AH
            STA     0605H
;LOAD TYPE FIELD- 2 BYTES:
ADDIN       MVI     A,00H
            STA     0606H
            MVI     A,00H
            STA     0607H
;NOTE:FOR THIS TEST THE ACTUAL DATA IS IN ADDRESSES
;0608-0632HEX FOR TRANSMISSION
;*************************************************************
;READ IN THE TEST DATA:
            MVI     C,PSTRING
            LXI     D,FMSG
            CALL    BDOS
            CALL    CRLF
            CALL    CONIN
            CALL    CRLF
;GO ONLINE UPON POWER UP:
            LXI     SP,LAST
```

```
            EI
            MVI     A,09H;CMD TO GO ONLINE
            OUT     CREG
            LXI     D,OLMSG
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            CALL    READ
;RUN ONBOARD DIAGNOSTICS TEST:
            MVI     A,0AH; CODE FOR SELF TEST COMMAND
            OUT     CREG
            LXI     D,STMSG
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            CALL    READ
;RUN MODULE INTERFACE LOOPBACK TEST:
            MVI     A,09H; GO BACK ONLINE
            OUT     CREG
            LXI     D,OLMSG
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            CALL    READ
;LOAD INTERRUPT ENABLE REGISTER=4. SET TO RECEIVE DATA.
            DI
            LXI     H,CEREG
            MVI     A,04H
            MOV     M,A
            OUT     IEREG
            EI
;RUN COMPLETE MODULE LOOP TEST:
            MVI     A,01H; ENTER MODULE LOOP TEST MODE
            OUT     CREG
            LXI     D,MLMSG
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            CALL    READ
            CALL    TRMSG;TRANSMIT TEST DATA BLOCK
            LXI     D,TRCMSG
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            CALL    READ
;******************* TEST ONLY-MODULE LOOPBACK ***************
; THIS PATCH ENABLES DATA TRANSFER TO HOST MEMORY IN TEST
            DI
            MVI     A,07H
            LXI     H,CEREG
            MOV     M,A
```

```
            OUT     IEREG
            EI
;***********************************************************
            MVI     A,03H;CLEAR LOOP TEST MODE
            OUT     CREG
            LXI     D,CLMSG
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            CALL    READ
;GO BACK ON-LINE
            MVI     A,09H
            OUT     CREG
            LXI     D,OLMSG
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            CALL    READ
;DISPLAY DATA TRANSFERRED VIA ETHERNET BOARD TO CRT:
            MVI     C,PSTRING
            LXI     D,LMSG
            CALL    BDOS
            CALL    CRLF
            CALL    CONOUT
            JMP     0     ;RETURN TO OPERATING SYSTEM
; END OF MAIN PROGRAM
;***********************************************************
;***********************************************************
; TRANSMIT SUBROUTINE:
TRMSG       DI
;LOOP UNTIL INTERRUPT ENABLE REGISTER =0 OR 4:
LOOP        LXI     H,CEREG ; CHECK IF NI3010 BUSY
            MOV     A,M
            CPI     00H
            JZ      CONT
            CPI     04H
            JZ      CONT
            EI
            JMP     LOOP
CONT        DI              ;DISABLE INTS. AND CHECK AGAIN
            LXI     H,CEREG
            MOV     A,M
            CPI     00H
            JZ      CONT1
            CPI     04H
            JZ      CONT1
            EI
            JMP     LOOP
CONT1       MVI     A,00H
            LXI     H,CEREG; DISABLE THE NI3010 INTERRUPTS
            MOV     M,A
```

```
            OUT     IEREG; SET INTERRUPT ENABLE REG = 0
            EI
ADDR1       EQU     00H; LOCATION OF TRANSMIT DATA START=
ADDR2       EQU     06H; 600 HEX
ADDR3       EQU     00H
            MVI     A,ADDR1; LOAD TRANSMIT MESSAGE 1ST ADDR
            OUT     EBAR
            MVI     A,ADDR2
            OUT     HBAR
            MVI     A,ADDR3
            OUT     LBAR
            MVI     A,00H;LOAD BYTE COUNT
            OUT     HBREG
            MVI     A,032H
            OUT     LBREG
            DI
            MVI     A,06H; ENABLE NI3010 TDD INTERRUPT
            LXI     H,CEREG
            MOV     M,A
            OUT     IEREG
            EI
DONE        MOV     A,M; READ THE COPY OF IEREG=CEREG
            CPI     06H
            JZ      DONE
TEST3       MVI     A,029H; LOAD TRANSMIT AND SEND COMMAND
            OUT     CREG
            RET
;END TRANSMIT SUBRCUTINE
;*****************************************************************
;READ STATUS SUBROUTINE:
READ        MVI      B,11111110B
            MVI      C,00H
RDLP        IN       ISREG
            ORA      B
            CPI      00FFH
            JNZ      RDLP;CONTINUE LOOP UNTIL STATUS REG READ
            IN       SREG
            CMP      C
            JNZ      EPMSG
            LXI      D,MSG
            MVI      C,09H
            CALL     BDOS
            CALL     CRLF
            JMP      RDONE
EPMSG       LXI      D,NMSG
            MVI      C,09H
            JMP      BDOS
            CALL     CRLF
RDONE       RET
;END READ SUBROUTINE:
;*****************************************************************
```

```
;INTERRUPT HANDLER:
;SAVE CPU STATE:
INTHDL      EI
            PUSH    PSW
            PUSH    B
            PUSH    D
            PUSH    H
            DI
            LXI     H,CEREG
            MOV     B,M; SAVE ENABLE REGISTER COPY VALUE
            MVI     A,00H
            LXI     H,CEREG; DISABLE NI3010 INTS.
            OUT     IEREG
            MOV     M,A
            MOV     A,B
            MVI     B,04H; IS RBA INTERRUPT ENABLED?
            CMP     B
            JZ      RBA
            MVI     B,07H; IS RDD INTERRUPT ENABLED?
            CMP     B
            JZ      RDD
            MVI     A,04H; IF NEITHER OF ABOVE THEN WAS TDD
            LXI     H,CEREG; ENABLE RBA INTERRUPT
            MOV     M,A
            OUT     IEREG
            JMP     FINI
RADD1       EQU     00H; 1ST ADDR TO WRITE RECVD FRAME TO=
RADD2       EQU     08H; 0800 HEX
RADD3       EQU     00H
RBA         MVI     A,RADD1; LOAD THE ADDRESS REGISTERS
            OUT     EBAR
            MVI     A,RADD2
            OUT     EBAR
            MVI     A,RADD3
            OUT     LBAR
            MVI     A,00H; NOW LOAD BYTE COUNT REGISTERS
            OUT     HBREG
            MVI     A,040H
            OUT     LBREG
            LXI     H,CEREG
            MVI     A,07H; ENABLE RDD INTERRUPT
            MOV     M,A
            OUT     IEREG
            JMP     FINI
RDD         LXI     H,CEREG
            MVI     A,04H
;RECEIVE PROCESS WAKE UP IN HERE
            MOV     M,A
            OUT     IEREG
FINI        EI
;RESTORE CPU STATE:
```

```
            POP     H
            POP     D
            POP     B
            DI
            MVI     A,020H; RESTORE INTERRUPT STATUS
            OUT     0FDH
            POP     PSW
            EI
            RET
;END INTERRUPT HANDLER
;*****************************************************************
CRLF        MVI     C,CONSOUT; GENERATES CARRIAGE RTN +LINE
            MVI     E,0DH
            CALL    BDOS
            MVI     C,CONSOUT
            MVI     E,0AH
            CALL    BDOS
            RET
;*****************************************************************
CONIN       LXI     H,0608H; READ TEST DATA INPUT FROM CONSO
INLP        MVI     C,CONSIN
            PUSH    H
            CALL    BDOS
            POP     H
            MOV     M,A
            CPI     60H;COMPARE TO GRAVE ACCENT
            RZ
            INX     H
            JMP     INLP
;*****************************************************************
CONOUT      LXI     H,0812H; OUTPUT TEST DATA TO THE CONSOLE
OTLP        MVI     C,CONSOUT
            MOV     E,M
            MOV     A,E
            CPI     60H;IF GRAVE ACCENT THEN RETURN
            RZ
            PUSH    H
            CALL    BDOS
            POP     H
            INX     H
            JMP     OTLP
;*****************************************************************
BMSG        DB      'ETHERNET LEVEL ONE TEST PROGRAM: VERS'
            DB      'ION: 1.13: 04/30/83-MDS$'
OLMSG       DB      'ONLINE COMMAND ISSUED$'
STMSG       DB      'SELF TEST COMMAND ISSUED$'
MLMSG       DB      'MODULE LOOPBACK COMMAND ISSUED$'
CLMSG       DB      'CLEAR LOOPBACK COMMAND ISSUED$'
TRCMSG      DB      'TRANSMIT/SEND COMMAND ISSUED$'
MSG         DB      'COMMAND EXECUTED$'
NMSG        DB      'COMMAND FAILED$'
```

```
FMSG        DB      'ENTER TEXT(42 CHAR MAX) FOR MODULE'
            DB      'INTERFACE LOOPBACK(42 CHAR MAX)      '
            DB      '        (END WITH A GRAVE ACCENT=> `)$'
LMSG        DB      'THE DATA TRANSFERRED VIA MODULE INTER'
            DB      'FACE LOOPBACK IS:$'
DMSG0       DB      'ENTER ADDRESS OF INSTALLED NI3010'
            DB      ' BOARD$'
DMSG1       DB      'BOARD 00-04-0A:ENTER " 1 "$'
DMSG2       DB      'BOARD 00-03-EA:ENTER " 2 "$'
DMSG3       DB      'INCORRECT SELECTION-TRY AGAIN:$'
;*************************************************************
;*************************************************************
            END;ETHERNET LEVEL ONE TEST PROGRAM-VERSION 1.13
```

APPENDIX G

SOURCE CODE OF PROGRAM ETHTESTB.ASM

```
;*****************************************************************
;*****************************************************************
;  ETHERNET SECOND LEVEL TEST PROGRAM--VERSION  2.04
;
;PROGRAM FILE NAME: ETHTESTB.COM- INVOKE COMMAND: ETHTESTB
;
;PROGRAM FUNCTION:(RUN ON 8080 BASED MDS SYSTEM)
;SELF TEST.IT THEN TRANSFERS A 42-BYTE BLOCK OF TEXT FROM A
;BLOCK OF MEMORY STARTING AT ADDRESS 0700 HEX TO ANOTHER
;BLOCK AT 0900 HEX IN TWO SEPARATE TESTS VIA THE NI3010
;BOARD.  SUCCESSFUL COMPLETION OF THESE TESTS VERIFIES THE
;FUNCTIONING OF ALL THE HARDWARE NECESSARY TO COMMUNICATE
;WITH OTHER HOSTS ON THE NETWORK.
;
;TESTS PERFORMED:
;           1.) BOARD DIAGNOSTIC SELF TEST
;           2.) MODULE INTERFACE LOOPBACK-VERIFIES THE
;               FUNCTIONING OF THE NI3010 BOARD INCLUDING THE
;               NM10 PROTOCOL MODULE.
;           3.) EXTERNAL LOOPBACK-VERIFIES THE FUNCTIONING OF
;               ABOVE AND THE FLAT CABLE,TRANSCEIVER AND
;               NETWORK COAXIAL CABLE.
;
;NI3010 ETHERNET BOARD CONFIGURATION:
;                   1.) JUMPER SET TO INTERRUPT LEVEL 5.
;                   2.) BASE PORT ADDRESS SWITCHES SET TO
;                       1011 (00B0H).
;                   3.) PARALLEL PRIORITY TO AN ODD NUMBERED
;                       MULTIBUS SLOT.
;
;ORIGINAL PROGRAM: 03/31/83
;
;LAST REVISION: 04/30/83
;
;WRITER: MARK D. STOTZER
;
;ADVISOR: PROF. U.R. KODRES
;
;*****************************************************************
;*****************************************************************
;MAIN PROGRAM:
           ORG     100H
; NI3010 REGISTER PORT ADDRESSES:
```

```
CREG        EQU     00B0H;CMD REG LOCATION
SREG        EQU     00B1H;CMD STATUS REG LOCATION
ISREG       EQU     00B5H;INTERRUPT STATUS REG
IEREG       EQU     00B8H;INTERRUPT ENABLE REG
EBAR        EQU     00B9H;EXTENDED BASE ADDR REG
HBAR        EQU     00BAH;HIGH BASE ADDR REG
LBAR        EQU     00BBH;LOW BASE ADDR REG
HBREG       EQU     00BCH;HIGH BYTE COUNT REG
LBREG       EQU     00BDH;LOW BYTE COUNT REG
;*****************************************************************
;OTHER NEEDED ADDRESSES:
BDOS        EQU     0005H;BDOS ENTRY POINT
CEREG       EQU     0800H;COPY OF INTERRUPT ENABLE REG
STATUS      EQU     0801H;COPY OF CMD STATUS REG
;*****************************************************************
;NEEDED BDOS COMMANDS:
PSTRING     EQU     09H; PRINT STRING FUNCTION
CONSIN      EQU     01H; CONSOLE CHAR INPUT FUNCTION
CONSOUT     EQU     02H; CONSOLE CHAR OUTPUT FUNCTION
;*****************************************************************
;READ CMD STATUS REG ON POWER UP:REQUIRED FOR INITIALIZATION
            IN      SREG
;*****************************************************************
;OUTPUT INITIAL MESSAGE TO USER:
            LXI     D,BMSG
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
;LOAD JUMP INSTRUCTION FOR INTERRUPT HANDLER: (INT 5)
            MVI     A,0C3H;JMP INST CODE
            STA     0028H ;LOAD IT IN ADDR 0028 HEX
            LXI     H,INTHDL
            SHLD    0029H
;*****************************************************************
;SET UP INTERRUPT CONTROL: (INT 5)
            MVI     A,012H
            OUT     0FDH
            MVI     A,0DFH; ENABLE INTERRUPT 5-ETHERNET BOARD
            OUT     0FCH
;*****************************************************************
;LOAD TRANSMIT DATA BLOCK-FIRST 3 BYTES ASSIGNED BY XEROX:
            MVI     A,02H
            STA     0700H
            MVI     A,07H
            STA     0701H
            MVI     A,01H
            STA     0702H
;LOAD INTERLAN ASSIGNED LAST 3 BYTES HERE:
DESTINP     CALL    CRLF
            LXI     D,DMSG0; ASK USER TO INPUT THIS ADDRESS
            MVI     C,PSTRING
```

```
            CALL    BDOS
            CALL    CRLF
            LXI     D,DMSG1
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            LXI     D,DMSG2
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            MVI     C,CONSIN;READ USER INPUT OF ADDRESS
            CALL    BDOS
            CPI     31H
            JZ      DADDR2
            CPI     32H
            JZ      DADDR1
            CALL    CRLF
            LXI     D,DMSG3
            MVI     C,PSTRING
            CALL    BDOS
            CALL    CRLF
            JMP     DESTINP
DADDR1      CALL    CRLF; ADDR 00-03-EA SELECTED BY USER:LOAD
            MVI     A,00H
            STA     0703H
            MVI     A,03H
            STA     0704H
            MVI     A,0EAH
            STA     0705H
            JMP     ADDIN
DADDR2      CALL    CRLF; ADDRESS 00-04-0A SELECTED:LOAD IT
            MVI     A,00H
            STA     0703H
            MVI     A,04H
            STA     0704H
            MVI     A,0AH
            STA     0705H
;LOAD TYPE FIELD- 2 BYTES:
ADDIN       MVI     A,00H
            STA     0606H
            MVI     A,00H
            STA     0607H
;NOTE:FOR THIS TEST THE ACTUAL DATA IS IN ADDRESSES
;0608-0632HEX FOR TRANSMISSION
;*************************************************************
;READ IN THE TEST DATA FOR MODULE INTERFACE LOOPBACK TEST:
            MVI     C,PSTRING
            LXI     D,FMSG
            CALL    BDOS
            CALL    CRLF
            CALL    CONIN
```

```
            CALL    CRLF
;GO ONLINE UPON POWER UP:
            EI
            MVI     A,09H;CMD TO GO ONLINE
            OUT     CREG
            CALL    READ
;*****************************************************************
;RUN ONBOARD DIAGNOSTICS TEST:
            MVI     A,0AH; CODE FOR SELF TEST COMMAND
            OUT     CREG
            CALL    READ
;*****************************************************************
;RUN MODULE INTERFACE LOOPBACK TEST:
            MVI     A,09H; GO BACK ONLINE
            OUT     CREG
            CALL    READ
;LOAD INTERRUPT ENABLE REGISTER=4. SET TO RECEIVE DATA.
            DI
            LXI     H,CEREG
            MVI     A,04H
            MOV     M,A
            OUT     IEREG
            EI
;COMMAND MODULE INTERFACE LOOPBACK MODE:
            MVI     A,02H
            OUT     CREG
            CALL    READ
;TRANSFER THE TEST DATA:
            CALL    TRMSG
            CALL    READ
;DISPLAY DATA TRANSFERRED BY MODULE INTERFACE LOOPBACK TEST:
            MVI     C,PSTRING
            LXI     D,LMSG
            CALL    BDOS
            CALL    CRLF
            CALL    CONOUT; TEXT OUTPUT TO THE CONSOLE
            CALL    CRLF
;*****************************************************************
;PERFORM INTERNAL LOOPBACK TEST:
;READ IN TEST DATA FOR EXTERNAL LOOPBACK TEST:
            MVI     C,PSTRING
            LXI     D,FEMSG
            CALL    BDOS
            CALL    CRLF
            CALL    CONIN
            CALL    CRLF
;EXIT INTERNAL LOOP TEST MODE:
            MVI     A,03H
            OUT     CREG
            CALL    READ
;GO BACK ONLINE:
```

```
            MVI     A,09H
            OUT     CREG
            CALL    READ
;TRANSMIT THE TEST DATA:
            CALL    TRMSG
            CALL    READ
;DISPLAY DATA TRANSFERRED VIA INTERNAL LOOPBACK TO CRT:
            MVI     C,PSTRING
            LXI     D,LEMSG
            CALL    BDOS
            CALL    CRLF
            CALL    CONOUT
            CALL    CRLF
            JMP     0     ;RETURN TO OPERATING SYSTEM
; END OF MAIN PROGRAM
;*****************************************************************
;*****************************************************************
; TRANSMIT SUBROUTINE:
TRMSG       DI
;LOOP UNTIL INTERRUPT ENABLE REGISTER =0 OR 4:
LOOP        LXI     H,CEREG
            MOV     A,M
            CPI     00H
            JZ      CONT
            CPI     04H
            JZ      CONT
            EI
            JMP     LOOP
CONT        DI
            LXI     H,CEREG
            MOV     A,M
            CPI     00H
            JZ      CONT1
            CPI     04H
            JZ      CONT1
            EI
            JMP     LOOP
CONT1       MVI     A,00H
            LXI     H,CEREG
            MOV     M,A
            OUT     IEREG; SET INTERRUPT ENABLE REG = 0
            EI
ADDR1       EQU     00H; LOCATION OF TRANSMIT BUFFER TOP
ADDR2       EQU     07H
ADDR3       EQU     00H
            MVI     A,ADDR1; LOAD TRANSMIT MESSAGE 1ST ADDR.
            OUT     EBAR
            MVI     A,ADDR2
            OUT     HBAR
            MVI     A,ADDR3
            OUT     LBAR
```

```
            MVI     A,00H;LOAD BYTE COUNT
            OUT     HBREG
            MVI     A,032H
            OUT     LBREG
            DI
            MVI     A,06H; ENABLE TDD INTERRUPT
            LXI     H,CEREG
            MOV     M,A
            OUT     IEREG
            EI
DONE        LXI      H,CEREG
            MOV     A,M; READ THE COPY OF IEREG=CEREG
            CPI     06H
            JZ      DONE
TEST3       MVI     A,029H; LOAD TRANSMIT AND SEND COMMAND
            OUT     CREG
            RET
;END TRANSMIT SUBROUTINE
;*****************************************************************
;READ STATUS SUBROUTINE:
READ        MVI      B,11111110B
            MVI      C,00H
RDLP        IN       ISREG
            ORA      B
            CPI      00FFH
            JNZ      RDLP;CONTINUE LOOP UNTIL STAT REG READY
            IN       SREG
            LXI      H,STATUS; KEEP COPY OF CMD STAT REG
            MOV      M,A
            CMP      C
            JNZ      ERMSG
            LXI      D,MSG
            MVI      C,PSTRING
            CALL     BDOS
            CALL     CRLF
            JMP      RDONE
ERMSG       LXI      D,NMSG
            MVI      C,PSTRING
            CALL     BDOS
            MVI      B,050H
            LXI      H,STATUS
            MOV      A,M
            ADD      B
            MVI      C,CONSOUT;ERROR CODE TO CONSOLE
            MOV      E,A
            CALL     BDOS
            CALL     CRLF
            LXI      D,NMSG1
            MVI      C,PSTRING
            CALL     BDOS
            CALL     CRLF
```

```
RDONE       RET
;END READ SUBROUTINE:
;*****************************************************************
;INTERRUPT HANDLER:
;SAVE CPU STATE:
INTHDL      EI
            PUSH    PSW
            PUSH    B
            PUSH    D
            PUSH    H
            DI
            LXI      H,CEREG
            MOV      B,M; SAVE ENABLE REGISTER COPY VALUE
            MVI      A,00H; DISABLE NI3010 INTERRUPTS
            LXI      H,CEREG
            MOV      M,A
            OUT      IEREG
            MOV      A,B
            MVI      B,04H; WAS RBA INTERRUPT ENABLED?
            CMP      B
            JZ       RBA
            MVI      B,07H; WAS RDD INTERRUPT ENABLED?
            CMP      B
            JZ       RDD
            MVI      A,04H; IF NEITHER OF THE ABOVE THEN
            LXI      H,CEREG; WAS TDD- NOW ENABLE RBA AGAIN
            MOV      M,A
            OUT      IEREG
            JMP      FINI
RADD1       EQU      00H; LOCATION OF WHERE TO WRITE RECVD
RADD2       EQU      09H; FRAME DATA IN HOST MEMORY
RADD3       EQU      00H
RBA         MVI      A,RADD1; NOW LOAD ADDR INTO ADDR REGS.
            OUT      EBAR
            MVI      A,RADD2
            OUT      HBAR
            MVI      A,RADD3
            OUT      LBAR
            MVI      A,00H; LOAD BYTE COUNT REGISTERS
            OUT      HBREG
            MVI      A,040H
            OUT      LBREG
            LXI      H,CEREG
            MVI      A,07H; ENABLE RDD INTERRUPT
            MOV      M,A
            OUT      IEREG
            JMP      FINI
RDD         LXI      H,CFREG
            MVI      A,04H
;RECEIVE PROCESS WAKE UP IN HERE
            MOV      M,A
```

```
            OUT     IEREG
FINI        EI
;RESTORE CPU STATE:
            POP     H
            POP     D
            POP     B
            DI
            MVI     A,020H; RESTORE INTERRUPT STATUS
            OUT     0FDH
            POP     PSW
            EI
            RET
;END INTERRUPT HANDLER
;*****************************************************************
CRLF        MVI     C,CONSOUT; GENERATES CARRIAGE RTN +LFEED
            MVI     E,0DH
            CALL    BDOS
            MVI     C,CONSCUT
            MVI     E,0AH
            CALL    BDOS
            RET
;*****************************************************************
CONIN       LXI     H,0708H; READ TEST DATA INPUT FROM CONS.
INLP        MVI     C,CONSIN
            PUSH    H
            CALL    BDOS
            POP     H
            MOV     M,A
            CPI     60H;IF GRAVE ACCENT THEN RETURN
            RZ
            INX     H
            JMP     INLP
;*****************************************************************
CONOUT      LXI     H,0912H; OUTPUT TEST DATA TO THE CONSCLE
OTLP        MVI     C,CONSOUT
            MOV     E,M
            MOV     A,E
            CPI     60H;TEST FOR END CHAR-GRAVE ACCENT
            RZ
            PUSH    H
            CALL    BDOS
            POP     H
            INX     H
            JMP     OTLP
;*****************************************************************
BMSG        DB      'ETHERNET SECOND LEVEL TEST PROGRAM:'
            DB      '  VERSION 2.04: 04/30/83-MDS$'
DMSG0       DB      'ENTER ADDRESS OF INSTALLED NI3010 '
            DB      'BOARD: $'
DMSG1       DB      'BOARD 00-04-0A:ENTER " 1 "$'
DMSG2       DB      'BOARD 00-03-EA:ENTER " 2 "$'
```

```
DMSG3       DB      'INCORRECT SELECTION NUMBER-TRY AGAIN:$'
MSG         DB      'EXECUTING BOARD COMMAND....$'
NMSG        DB      'COMMAND FAILED-ERROR CODE:$'
NMSG1       DB      'FOR INTERPRETATION OF ERROR CODES-SEE'
            DB      'ASM LISTING FILE$'
FMSG        DB      'ENTER TEXT(42 CHAR MAX) FOR MODULE'
            DB      ' INTERFACE LOOPBACK TEST:          '
            DB      '                                   '
            DB      '(END STRING WITH A GRAVE ACCENT=> `)$'
FEMSG       DB      'ENTER TEXT(42 CHAR MAX) FOR INTERNAL'
            DB      ' LOOPBACK TEST:                    '
            DB      '                                   '
            DB      '(END STRING WITH A GRAVE ACCENT=> `)$'
LMSG        DB      'THE DATA TRANSFERRED BY MODULE'
            DB      ' INTERFACE LOOPBACK IS:$'
LEMSG       DB      'THE DATA TRANSFERRED BY INTERNAL'
            DB      ' LOOPBACK IS:$'
;*************************************************************
;ERROR CODES:(IN RESPONSE TO TRANSMISSION COMMAND FAILURES):
;
;              LETTER      |    NATURE OF FAILURE
;-------------------------------------------------------------
;
;                 S            YOU ISSUED AN INAPPROPRIATE COM
;                              MODE THE BOARD IS IN.
;
;                 T            BOARD TIMER TIMED OUT-POSSIBLE
;                              PROBLEM.
;
;                 U            TRANSMIT BUFFER SIZE EXCEEDED:(
;
;                 V            FRAME SENT TO BOARD TOO SMALL:(
;
;                 X            EXCESSIVE COLLISIONS
;
;*************************************************************
;*************************************************************
            END;ETHERNET SECOND LEVEL TEST PROGRAM-VERSION 2.
```

APPENDIX H

SOURCE CODE OF MAIN MODULE ETHERNET.PLI

```
ETHERNET:/*MAIN MODULE-APPLICATION LAYER-ISO LEVEL 7*/

PROCEDURE OPTIONS (MAIN);

DECLARE
        /* LOCAL VARIABLES */
        COUNT7    FIXED BINARY(7),/*LOOP CONTROL VARIABLE*/
        COUNT7A   FIXED BINARY(7),/*LOOP CONTROL*/
        COUNT7B   FIXED BINARY(7),/*LOOP CONTROL*/
        COUNT7C   FIXED BINARY(7),/*LOOP CONTROL*/
        DSKNO     CHARACTER(1),/*USER INPUT DISK NUMBER*/
        FRAMD     CHARACTER(1),/*USER INPUT FRAME SIZE*/
        SELECT    CHARACTER(1),/*USER INPUT MODE SELECTION*/
        /* GLOBAL VARIABLES */
        RECFIL    FIXED BINARY(7) EXTERNAL,/*RECVD FILE NO.*/
        FRSIZE    FIXED BINARY(15) EXTERNAL,/*FRAME SIZE*/
        VTERM     FIXED BINARY(7) EXTERNAL,/*TERMINAL FLAG*/
        TRMODE    FIXED BINARY(7) EXTERNAL,/*CMD MODE FLAG*/
        /* GLOBAL DATA STRUCTURES */
        TXBUFF(1508) FIXED BINARY(7) EXTERNAL,/*TRANS BUFF*/
        RXBUFF(1522) FIXED BINARY(7) EXTERNAL,/*RECV BUFF*/
        TXTBUF (128) FIXED BINARY(7) EXTERNAL,/*TEXT BUFF*/
        1 RXFCB EXTERNAL,/*RECEIVE FILE CONTROL BLOCK*/
          2 DISK FIXED BINARY(7),
          2 FNAME CHARACTER(8),
          2 FTYPE CHARACTER(3),
          2 RFCB(24) FIXED BINARY(7),
        1 TXFCB EXTERNAL,/*TRANSMIT FILE CONTROL BLOCK*/
          2 DISK FIXED BINARY(7),
          2 FNAME CHARACTER(8),
          2 FTYPE CHARACTER(3),
          2 TFCB(24) FIXED BINARY(7),
        /* EXTERNAL MODULES */
        INIT      ENTRY,/* INITIALIZES INTERRUPTS & NI3010*/
        SENDATA   ENTRY,/* TRANSMIT ISO LEVEL 6 MODULE */
        RECEIVE   ENTRY;/* RECEIVE MODULE */

 /*LAST REVISION: 09/15/83-0900 ORIGINAL PROGRAM:07/29/83 */
 /*AUTHOR: CAPT. MARK D. STOTZER-USMC-AEGIS GROUP         */
 /*THESIS ADVISOR: PROFESSOR UNO R. KODRES-COMP. SCIENCE  */

PUT SKIP LIST('*****************************************');
PUT SKIP LIST('ETHERNET COMMUNICATION PROGRAM-VERSION 5.0');
```

```
PUT SKIP LIST('ALLOWS THIS HOST TO CONNECT TO THE NET.');
PUT SKIP LIST('CNTL-H=BACKSPACE FOR TEXT ENTRIES:');
PUT SKIP LIST('*****************************************');
PUT SKIP(2);
RECFIL=47;
COUNT7=1;
DO WHILE (COUNT7=1);
   COUNT7A=1;
   DO WHILE(COUNT7A=1);
      PUT SKIP(2);
      PUT SKIP LIST('************ MAIN MENU ************');
      PUT SKIP LIST('WRITE RECEIVED FILES TO DISK NO:');
      PUT SKIP LIST('DEFAULT DRIVE(A)    = 1');
      PUT SKIP LIST('DISK DRIVE A        = 2');
      PUT SKIP LIST('DISK DRIVE B        = 3');
      PUT SKIP LIST('************************************');
      PUT SKIP LIST('ENTER DRIVE NUMBER==>');
      GET LIST(DSKNO);
      PUT SKIP(2);
      IF DSKNO='1' THEN
         DO;
           RXFCB.DISK=0;/* LOAD DISK NUMBER IN FCB */
           COUNT7A=2;
         END;
      ELSE
      IF DSKNO='2' THEN
         DO;
           RXFCB.DISK=1;/* DISK NUMBER TO FCB */
           COUNT7A=2;
         END;
      ELSE
      IF DSKNO='3' THEN
         DO;
           RXFCB.DISK=2;/* DISK NUMBER TO FCB */
           COUNT7A=2;
         END;
      ELSE
         PUT SKIP LIST('INVALID DRIVE NUMBER-REENTER:');
   END;/*DO LOOP*/
   COUNT7B=1;
   DO WHILE (COUNT7B=1);
      PUT SKIP LIST('ETHERNET FRAME DATA BLOCK SIZE:');
      PUT SKIP LIST('SELECT 128 FOR ALL FILE OPERATIONS');
      PUT SKIP LIST('AND VAX COMMUNICATIONS.');
      PUT SKIP LIST('    128 BYTES     = 1');
      PUT SKIP LIST('    256 BYTES     = 2');
      PUT SKIP LIST('    512 BYTES     = 3');
      PUT SKIP LIST('   1024 BYTES     = 4');
      PUT SKIP LIST('   1500 BYTES     = 5');
      PUT SKIP LIST('************************************');
      PUT SKIP LIST('ENTER SELECTION==>');
```

```
      GET LIST(FRAMD);
      PUT SKIP(2);
      IF FRAMD='1' THEN
         DO;
           FRSIZE=128;/* SET THE FRAME SIZE */
           COUNT7B=2;
         END;
      ELSE
      IF FRAMD='2' THEN
         DO;
           FRSIZE=256;/* SET  FRAME SIZE */
           COUNT7B=2;
         END;
      ELSE
      IF FRAMD='3' THEN
         DO;
           FRSIZE=512;/* SET FRAME SIZE */
           COUNT7B=2;
         END;
      ELSE
      IF FRAMD='4' THEN
         DO;
           FRSIZE=1024;/* SET THE FRAME SIZE */
           COUNT7B=2;
         END;
      ELSE
      IF FRAMD='5' THEN
         DO;
           FRSIZE=1500;/* SET FRAME SIZE */
           COUNT7B=2;
         END;
      ELSE
         PUT SKIP LIST('INCORRECT CHOICE-REENTER:');
   END;/* DO LOOP */
   VTERM=0;/* RESET TERMINAL FLAG TO FALSE */
   TPMODE=0;/* RESET COMMAND MODE FLAG TO FALSE */
   CALL INIT;
   PUT SKIP LIST('OPERATING MODES:');
   PUT SKIP LIST('*****************************');
   PUT SKIP LIST('RECEIVE WAIT LOOP       = 1');
   PUT SKIP LIST('TRANSMIT FILE OR MESSAGE= 2');
   PUT SKIP LIST('VIRTUAL TERMINAL OF VAX = 3');
   PUT SKIP LIST('VAX COMMAND MODE        = 4');
   PUT SKIP LIST('DISCONNECT FROM NET     = 5');
   PUT SKIP LIST('*****************************************');
   PUT SKIP LIST('ENTER SELECTION ==>');
   GET LIST(SELECT);
   PUT SKIP(2);
   IF SELECT='1' THEN /* RECEIVE MODE */
      DO;
        TXBUFF(1)=2;/* LOAD FIRST THREE DEST ADDR BYTES */
```

```
      TXBUFF(2)=7;/* FOR ACK REPLY IN RECEIVE MODE */
      TXBUFF(3)=1;
      PUT SKIP LIST('IN RECEIVE WAIT LOOP-TO RETURN TO');
      PUT SKIP LIST('MAIN MENU: ENTER <CR> ==>');
      PUT SKIP LIST('**********************************');
      PUT SKIP(2);
      CALL RECEIVE;
   END;
ELSE
IF SELECT='2' THEN /* NORMAL TRANSMIT */
   CALL TRANS2  ;
ELSE
IF SELECT='3' THEN /* VAX TERMINAL MODE */
   DO;
      VTERM=1;/* SET THE TERMINAL FLAG TO TRUE */
      FRSIZE=1500;
      PUT SKIP LIST('******* VAX TERMINAL MODE *******');
      PUT SKIP(1);
      PUT SKIP LIST('VAX TERMINAL SERVICE:');
      PUT SKIP LIST('DATA BLOCK SIZE PER FRAME=');
      PUT LIST(FRSIZE);
      PUT SKIP LIST('----------------------------------');
      PUT SKIP LIST('TERMINAL ENTRY BY LINE OF TEXT');
      PUT SKIP LIST('BEGIN AFTER INITIAL V PROMPT: "V>"');
      PUT SKIP LIST('ENTER: TEXT LINE<CR>');
      PUT SKIP LIST('PROMPT WILL AUTOMATICALLY REAPPEAR');
      PUT SKIP LIST('UPON ENTRY OF THE FIRST CHARACTER');
      PUT SKIP LIST('OF THE NEXT LINE YOU BEGIN.');
      PUT SKIP LIST('----------------------------------');
      PUT SKIP LIST('TO END TERMINAL SESSION:');
      PUT SKIP LIST('ENTER: "."<CR> AFTER "V>"');
      PUT SKIP LIST('----------------------------------');
      PUT SKIP(1);
      TXBUFF(1)=2; /* LOAD THE VAX NET ADDR INTO THE SIX*/
      TXBUFF(2)=7; /* ADDRESS BYTES */
      TXBUFF(3)=1;
      TXBUFF(4)=0;
      TXBUFF(5)=7;
      TXBUFF(6)=127;
      TXBUFF(7)=0;/* LOAD THE TYPE TWO TYPE FIELD BYTES */
      TXBUFF(8)=0;
      COUNT7C=1;
      PUT SKIP LIST('V>');
      DO WHILE (COUNT7C=1);
         CALL SENDATA;
         PUT SKIP LIST('V>');
         IF VTERM=0 THEN /*END TERMINAL SESSION*/
            DO;
              PUT SKIP LIST('**** END TERMINAL SESSION ****');
              COUNT7C=2;
            END;
```

```
            ELSE
               DO;
                  CALL INIT;
                  CALL RECEIVE;
                  PUT LIST('^H^H^HV>');
               END;
         END; /* DO LOOP */
      END;
   ELSE
   IF SELECT='4' THEN /* VAX COMMAND MODE */
      DO;
         PUT SKIP LIST('*** VAX COMMAND INSTRUCTIONS ***');
         PUT SKIP LIST('-------------------------------');
         PUT SKIP LIST('TO DOWNLOAD A FILE FROM THE VAX:');
         PUT SKIP LIST('ENTER THE MESSAGE:');
         PUT SKIP LIST('" !FNAME(VAX).FTYPE(VAX)/XXX` "');
         PUT SKIP LIST('WHERE "XXX"="EXE" FOR NON-TEXT FILES');
         PUT SKIP LIST('AND   "XXX"="TXT" FOR TEXT FILES');
         PUT SKIP LIST('FILE WILL THEN BE IMMEDIATELY SENT');
         PUT SKIP LIST('TO THIS HOST.');
         PUT SKIP LIST('-----------------------------------');
         PUT SKIP LIST('TO UPLOAD A FILE TO THE VAX:');
         PUT SKIP LIST('1.) ENTER THE MESSAGE:');
         PUT SKIP LIST('" @FNAME(VAX).FTYPE(VAX)/XXX` "');
         PUT SKIP LIST('TO OPEN A VAX FILE BY THE ABOVE NAME');
         PUT SKIP LIST('2.) THEN:');
         PUT SKIP LIST('SEND THE FILE TO THE VAX ADDRESS USING');
         PUT SKIP LIST('THE NORMAL FILE SENDING SELECTIONS.');
         PUT SKIP LIST('-----------------------------------');
         PUT SKIP(1);
         TRMODE=1; /*SET VAX CMD MODE FLAG TO TRUE*/
         FRSIZE=128;
         TXBUFF(1)=2; /*LOAD THE VAX NET ADDR INTO THE SIX */
         TXBUFF(2)=7; /*ADDRESS BYTES */
         TXBUFF(3)=1;
         TXBUFF(4)=0;
         TXBUFF(5)=7;
         TXBUFF(6)=127;
         TXBUFF(7)=0;/* LOAD THE TWO TYPE FIELD BYTES */
         TXBUFF(8)=0;
         CALL SENDATA;
         CALL INIT;
         RXBUFF(17)=255;
         CALL RECEIVE;
      END;
   ELSE
   IF SELECT='5' THEN /* DISCONNECT BY EXITING TO CP/M */
      COUNT7=2;
   ELSE
   PUT SKIP LIST('INCORRECT OPMODE SELECTION-REENTER:');
END; /* DO LOOP */
```

```
PUT SKIP LIST('DISCONNECTING FROM NET-RETURNING TO CP/M.');

TRANS2: /* GETS USER INPUT OF FILE DATA */

PROCEDURE;

DECLARE
        /* LOCAL VARIABLES */
        COUNT6   FIXED BINARY(7),/* LOOP CONTROL*/
        COUNT6A  FIXED BINARY(7),/* LOOP CONTROL*/
        COUNT6B  FIXED BINARY(7),/*LOOP CONTROL*/
        COUNT6C  FIXED BINARY(7),/*LOOP CONTROL*/
        SENDTYPE CHARACTER(1),/*USER INPUT TRANSMIT TYPE*/
        FTYP     CHARACTER(1),/*USER INPUT FILETYPE*/
        DRNO     CHARACTER(1),/*USER INPUT DRIVE NO.*/
        /* FILE DATA ENTRY DCLS */
        I FIXED,
        FN CHARACTER(20),
        LOWER CHARACTER(26) STATIC INITIAL
        ('abcdefghijklmnopqrstuvwxyz'),
        UPPER CHARACTER(26) STATIC INITIAL
        ('ABCDEFGHIJKLMNOPQRSTUVWXYZ'),
        /* GLOBAL VARIABLES */
        FILTYP   FIXED BINARY (7) EXTERNAL,/* FILE NATURE*/
        FNOP FIXED BINARY (7) EXTERNAL,/*FILE NOT OPEN FLG*/
        /* GLOBAL DATA STRUCTURES */
        TXBUFF(1508) FIXED BINARY(7) EXTERNAL,/*TRANS BUFF*/
        1 TXFCB EXTERNAL,/*TRANSMIT FILE CONTROL BLOCK*/
          2 DISK FIXED BINARY(7),
          2 FNAME CHARACTER(8),
          2 FTYPE CHARACTER(3),
          2 TFCB(24) FIXED BINARY(7),
        /* EXTERNAL MODULES */
        SENDATA   ENTRY;/* ISO LEVEL 3 FRAME SENDER*/

COUNT6 =1;
DO WHILE(COUNT6=1);
   PUT SKIP LIST('TRANSMISSION OPTIONS:');
   PUT SKIP LIST('SEND A MESSAGE   = 1');
   PUT SKIP LIST('SEND A DISK FILE = 2');
   PUT SKIP LIST('****************************************');
   PUT SKIP LIST('ENTER SELECTION ==>');
   GET LIST(SENDTYPE);
   PUT SKIP(2);
   TXBUFF(8)=0;/* TYPE FIELD BYTE 2=NORMAL MSG OR FILE*/
   IF SENDTYPE='1' THEN /*SEND A MESSAGE */
      DO;
        TXBUFF(7)=0;/*TYPE FIELD BYTE 1=MESSAGE*/
        CALL SENDATA;
        COUNT6=2;
      END;
```

```
ELSE
IF SENDTYPE='2' THEN /*SEND A DISK FILE*/
   DO;
     TXBUFF(7)=15;/* TYPE FIELD BYTE 1= FILE*/
     COUNT6A=1;
     DO WHILE(COUNT6A=1);
        PUT SKIP LIST('NATURE OF FILE TO SEND:');
        PUT SKIP LIST('TEXT (ASCII) FILE       = 1');
        PUT SKIP LIST('MACHINE CODE (COM) FILE = 2');
        PUT SKIP LIST('*********************************');
        PUT SKIP LIST('ENTER TYPE OF FILE CHOICE ==>');
        GET LIST(FTYP);
        PUT SKIP(2);
        IF FTYP='1' THEN
           DO;
             FILTYP=1;/* SET THE FILETYP=TEXT FILE */
             COUNT6A=2;
           END;
        ELSE
        IF FTYP='2'  THEN
           DO;
             FILTYP=2;/* FILE TYPE=MACHINE FILE */
             COUNT6A=2;
           END;
        ELSE
        PUT SKIP LIST('INCORRECT CHOICE-REENTER:');
     END;/* DO LOOP */
     COUNT6B=1;
     DO WHILE(COUNT6B=1);
        COUNT6C=1;
        DO WHILE(COUNT6C=1);
           PUT SKIP LIST('SPECIFY FILE TO SEND:');
           PUT SKIP LIST('FILE LOCATED ON:');
           PUT SKIP LIST('  DRIVE A = 1');
           PUT SKIP LIST('  DRIVE B = 2');
           PUT SKIP LIST('********************');
           PUT SKIP LIST('ENTER DRIVE NUMBER==>');
           GET LIST(DRNO);
           PUT SKIP(2);
           IF DRNO='1' THEN
              DO;
                TXFCB.DISK=1;
                COUNT6C=2;
              END;
           ELSE
           IF DRNO='2' THEN
              DO;
                TXFCB.DISK=2;
                COUNT6C=2;
              END;
           ELSE
```

```
                PUT SKIP LIST('INVALID DRIVE-REENTER:');
            END;/* DO LOOP */
            PUT SKIP LIST('ENTER:"FILENAME.FILETYPE"==>');
            GET LIST(FN);
            PUT SKIP(2);
            FN=TRANSLATE(FN,UPPER,LOWER);
            I=INDEX(FN,'.');
            IF I=0 THEN
               DO;
                 TXFCB.FNAME=FN;
                 TXFCB.FTYPE='   ';
               END;
            ELSE
               DO;
                 TXFCB.FNAME=SUBSTR(FN,1,I-1);
                 TXFCB.FTYPE=SUBSTR(FN,I+1);
               END;
            TXFCB.TFCB(1)=0;/* SET FCB FIELDS THAT COUNT=0*/
            TXFCB.TFCB(4)=0;/CURRENT EXTENT,RECORD ETC. */
            TXFCB.TFCB(21)=0;
            CALL SENDATA;
            IF FNOP~=1 THEN
               COUNT6B=2;
         END;/* DO LOOP */
         COUNT6=2;
      END;
   ELSE
      PUT SKIP LIST('INCORRECT TRANSMIT MODE-REENTER:');
END; /* DO LOOP */
END TRANS2;

END ETHERNET;/* ISO LAYER 7 MODULE */
```

APPENDIX I

SOURCE CODE FOR MODULE SENDATA.PLI

```
SENDATA: /* PRESENTATION LAYER MODULE-ISO LEVEL 6 */

PROCEDURE;

DECLARE
        /* LOCAL VARIABLES */
        COUNT5A  FIXED BINARY(7),/*LOOP CONTROL*/
        DESTADDR CHARACTER(1),/* DEST ADDRESS-USER INPUT*/
        /* GLOBAL VARIABLES */
        TRMODE   FIXED BINARY(7) EXTERNAL,/*VAX CMD FLAG*/
        VTERM    FIXED BINARY(7) EXTERNAL,/*TERMINAL FLAG*/
        FRSIZE   FIXED BINARY(15) EXTERNAL,/*FRAME SIZE*/
        /* GLOBAL DATA STRUCTURES */
        TXBUFF(1508) FIXED BINARY(7) EXTERNAL;/*TRANS BUFF*/

 /*LAST REVISION: 09/15/83-0900 ORIGINAL PROGRAM:07/29/83*/
 /*AUTHOR: CAPT. MARK D. STOTZER-USMC-AEGIS GROUP        */
 /*THESIS ADVISOR: PROF. UNO R. KODRES-COMPUTER SCIENCE  */

IF VTERM= 1 THEN /* TERMINAL MODE */
   DO;
     CALL SENDMSG;
     RETURN;
   END;
IF TRMODE= 1 THEN /* VAX COMMAND MODE */
   DO;
     CALL SENDMSG;
     RETURN;
   END;
COUNT5A=1;
DO WHILE(COUNT5A=1);
   PUT SKIP LIST('ADDRESSES ON THIS NETWORK:');
   PUT SKIP LIST('00-03-EA: MDS SYSTEM  = 1');
   PUT SKIP LIST('00-04-0A: MDS SYSTEM  = 2');
   PUT SKIP LIST('00-07-7F: VAX 11/780  = 3');
   PUT SKIP LIST('*****************************');
   PUT SKIP LIST('ENTER SELECTION ==>');
   GET LIST(DESTADDR);
   PUT SKIP(2);
   TXBUFF(1)=2; /*LOAD THE FIRST FOUR DEST ADDR BYTES*/
   TXBUFF'2)=7;
   TXBUFF'3)=1;
   TXBUFF(4)=0;
```

```
   IF DESTADDR='1' THEN
      DO;
        TXBUFF(5)=3;/*LOAD LAST TWO DEST ADDR BYTES*/
        TXBUFF(6)=234;
        IF TXBUFF(7)=0 THEN/* SEND THE MSG*/
           CALL SENDMSG;
        ELSE
           CALL SENDFILE;/*SEND THE FILE*/
        COUNT5A=2;
      END;
   ELSE
   IF DESTADDR='2' THEN
      DO;
        TXBUFF(5)=4;/*LOAD LAST TWO DESTINATON ADDR BYTES*/
        TXBUFF(6)=10;
        IF TXBUFF(7)=0 THEN
           CALL SENDMSG;
        ELSE
           CALL SENDFILE;
        COUNT5A=2;
      END;
   ELSE
   IF DESTADDR='3' THEN
      DO;
        TXBUFF(5)=7;/LOAD LAST TWO DEST ADDR BYTES*/
        TXBUFF(6)=127;
        TRMODE=0;
        IF TXBUFF(7)=0 THEN
           CALL SENDMSG;
        ELSE
           CALL SENDFILE;
        COUNT5A=2;
      END;
   ELSE
   PUT SKIP LIST('INVALID NET ADDRESS SELECTED-REENTER:');
END; /* DO LOOP */

SENDMSG: /* MESSAGE SENDING MODULE */

PROCEDURE;

DECLARE  /* LOCAL VARIABLES */
         /* GLOBAL VARIABLES */
         FRSIZE  FIXED BINARY(15) EXTERNAL,/*FRAME SIZE*/
         TRMODE  FIXED BINARY(7)  EXTERNAL,/*VAX CMD FLAG*/
         VTERM   FIXED BINARY(7)  EXTERNAL,/*TERMINAL FLAG*/
         /* GLOBAL DATA STRUCTURES */
         TXBUFF(1508) FIXED BINARY(7) EXTERNAL,/*TRANS BUF*/
         RXBUFF(1522) FIXED BINARY(7) EXTERNAL,/*RECV BUFF*/
         /* EXTERNAL MODULES */
         FILBUF   ENTRY,/* LOADS TRANS.BUFFER FROM CONSOLE*/
```

```
          SENDFRAM ENTRY;/* ISO LEVEL 3 FRAME SENDER*/

IF VTERM=1 THEN /* VIRTUAL TERMINAL MODE */
   DO;
     CALL FILBUF;
     IF TXBUFF(9)=96 THEN
        RETURN;
     IF TXBUFF(9)=46 & TXBUFF(10)=96 THEN /*END SESSION*/
        VTERM=0; /*END TERMINAL SESSION*/
     ELSE
        CALL SENDFRAM;
   END;
ELSE
   DO;
     PUT SKIP LIST('MESSAGE SENDER:');
     PUT SKIP LIST('MAXIMUM NUMBER OF CHARACTERS= ');
     PUT LIST(FRSIZE);
     PUT SKIP LIST('ENTER MESSAGE AFTER PROMPT: >');
     PUT SKIP LIST('END MESSAGE WITH ACCENT: ` ');
     PUT SKIP LIST('>');
     CALL FILBUF; /*FILL TRANSMIT BUFFER FROM CONSOLE*/
     CALL SENDFRAM; /* SEND THE MESSAGE */
   END;
END SENDMSG;

SENDFILE: /* FILE SENDING MODULE*/

PROCEDURE;
DECLARE   /* LOCAL VARIABLES */
          COUNT4  FIXED BINARY(7),/*LOOP CONTROL*/
          /* GLOBAL VARIABLES */
          FILTYP FIXED BINARY(7) EXTERNAL,/*FILE NATURE*/
          FNOP   FIXED BINARY(7) EXTERNAL,/*NOT OPEN FLAG*/
          LFRM   FIXED BINARY(7) EXTERNAL,/*LAST DATA FLAG*/
          /* GLOBAL DATA STRUCTURES */
          TXBUFF(1508) FIXED BINARY(7) EXTERNAL,
          /* EXTERNAL MODULES */
          VAXTXT ENTRY,/* CP/M TO VAX FORMAT CONVERTER*/
          TRNDMA ENTRY,/*TRANSMIT SET DMA ADDRESS*/
          OPENDF ENTRY,/*OPEN DISK FILE*/
          RDISK  ENTRY,/*READ DISK FILE RECORD*/
          SENDFRAM ENTRY;/*ISO LEVEL 3 FRAME SENDER*/

 /*LAST REVISION: 08/25/83-1530 ORIGINAL PROGRAM:08/16/83 */
 /*AUTHOR: CAPT. MARK D. STOTZER-USMC-AEGIS GROUP         */
 /*THESIS ADVISOR: PROF. UNO R. KODRES-COMPUTER SCIENCE   */

TXBUFF(7)=15;/* LOAD TYPE FIELD BYTES*/
TXBUFF(8)=0;
CALL OPENDF;
IF FNOP=1 THEN /*FILE NOT ON DISK*/
```

```
   DO;
     PUT SKIP LIST('FILE NOT ON DISK-REENTER DATA:');
     PUT SKIP(2);
     RETURN;
   END;
IF TXBUFF(6)=127 & FILTYP=1 THEN
     CALL VAXTXT;  /*VAX TEXT FILE FORMAT CONVERTER*/
ELSE
   DO;
     CALL TRNDMA; /* SET DISK DMA ADDRESS*/
     PUT SKIP LIST('******* FILE TRANSFER BEGINS ******');
     PUT SKIP(2);
     COUNT4=1;
     DO WHILE(COUNT4=1);
        CALL RDISK; /*READ A DISK FILE RECORD*/
        IF LFRM=1 THEN
           DO;
             CALL SENDFRAM;
             TXBUFF(8)=1;/*ENCODE TYPE FLD=INTERMED FRAME*/
           END;
        ELSE
           COUNT4=2;
     END;/* DO LOOP */
     TXBUFF(8)=255;/*ENCODE TYPE FIELD=LAST FRAME*/
     CALL SENDFRAM;
     PUT SKIP LIST('***** FILE TRANSFER ENDS *****');
     PUT SKIP(2);
     RETURN;
   END;
END SENDFILE;

END SENDATA; /* ISO LAYER 6 TRANSMIT MODULE */
```

APPENDIX J

SOURCE CODE FOR MODULE RECDATA.PLI

```
RECDATA: /* ISO LAYER 6 RECEIVE MODULE */

PROCEDURE;

DECLARE  /* GLOBAL DATA STRUCTURES */
         RXBUFF(1522) FIXED BINARY(7) EXTERNAL;/*RCV BUFF*/

 /*LAST REVISION: 09/15/83-1215 ORIGINAL PROGRAM:08/17/83 */
 /*AUTHOR: CAPT MARK D. STOTZER-USMC-AEGIS GROUP          */
 /*THESIS ADVISOR: PROF. UNO R. KODRES-COMPUTER SCIENCE   */

IF RXBUFF(17)= 0 THEN /* MESSAGE FRAME */
   CALL CONMSG;
ELSE
IF RXBUFF(17)= 15 THEN /* FILE FRAME */
   CALL FILER;
ELSE
   PUT SKIP LIST('RECEIVED IMPROPERLY ENCODED FRAME');


CONMSG: /* MESSAGE RECEIPT MODULE */

PROCEDURE;

DECLARE   /* GLOBAL VARIABLES */
          TRMODE  FIXED BINARY(7) EXTERNAL,/*VAX CMD FLAG*/
          FRSIZE  FIXED BINARY(15) EXTERNAL,/*FRAME SIZE*/
          VTERM   FIXED BINARY(7) EXTERNAL,/*TERMINAL FLAG*/
          /* GLOBAL DATA STRUCTURES */
          RXBUFF(1522) FIXED BINARY(7) EXTERNAL,/*RECV BUF*/
          /* EXTERNAL MODULES */
          TRMSG ENTRY,/* ACKNOWLEDGE SENDER*/
          EMTBUF ENTRY;/*DUMPS RECEIVE BUFFER TO CONSOLE*/


     IF VTERM^=1 THEN /* NOT IN VIRTUAL TERMINAL MODE*/
        DO;
          PUT SKIP LIST('***** RECEIVED MESSAGE IS:');
          PUT SKIP(2);
        END;
     CALL EMTBUF; /* DUMP THE RECVD FRAME DATA TO CONSOLE */
     CALL TRMSG;  /* SEND THE ACK FRAME */
     IF VTERM^=1 THEN /*NOT IN TERMINAL MODE*/
```

```
        DO;
          PUT SKIP(2);
          PUT SKIP LIST('***** END OF MESSAGE TEXT.');
          PUT SKIP(2);
          PUT SKIP LIST('BACK IN WAIT LOOP-ENTER<CR> TO EXIT=>');
          PUT SKIP LIST('**************************************');
          PUT SKIP(2);
        END;
      ELSE
      IF RXBUFF(18)= 15 THEN /*LAST FRAME OF TERMINAL REPLY*/
         PUT SKIP LIST('V>');
END CONMSG;


FILER: /* FILE FRAME RECEIPT MODULE*/

PROCEDURE;

DECLARE     /*  GLOBAL VARIABLES */
            TRMODE    FIXED BINARY(7) EXTERNAL,/*CMD FLAG*/
            RECFIL    FIXED BINARY(7) EXTERNAL,/*RFILE NO.*/
            VTERM     FIXED BINARY(7) EXTERNAL,/*TERM FLAG*/
            /* GLOBAL DATA STRUCTURES */
            1 RXFCB EXTERNAL,/*RECEIVE FILE CONTROL BLOCK*/
              2 DISK FIXED BINARY(7),
              2 FNAME CHARACTER(8),
              2 FTYPE CHARACTER(3),
              2 TFCB(24) FIXED BINARY(7),
            RXBUFF(1522) FIXED BINARY(7) EXTERNAL,/*RX BUF*/
            /* EXTERNAL MODULES */
            RCVDMA ENTRY,/*SETS RECEIVE DISK DMA ADDR*/
            DELEDF ENTRY,/*DELETES FILES*/
            MAKEDF ENTRY,/*MAKES NEW DISK FILES*/
            WRDISK ENTRY,/*WRITES A DISK RECORD*/
            TRMSG  ENTRY,/*SENDS ACK FRAMES*/
            CLOSDF ENTRY;/*CLOSES DISK FILES*/

CALL RCVDMA;
IF RXBUFF(18)=0 THEN /* FIRST FILE FRAME */
   DO;
     PUT SKIP LIST('******* FILE RECEIPT BEGINS *******');
     PUT SKIP LIST('  OPENING FILE- RECFROM_.NET:');
     PUT SKIP(2);
     RXFCB.FNAME='RECFROM ''; /*NAME THE RECEIVED FILE*/
     RXFCB.FTYPE='NET';
     RXFCB.TFCB(1)=0; /*ZERO THREE FIELDS OF FCB*/
     RXFCB.TFCB(4)=0;
     RXFCB.TFCB(21)=0;
     CALL DELEDF; /*DELETE OLD FILE OF THIS FN.FT*/
     CALL MAKEDF; /*CREATE A NEW ONE*/
     CALL WRDISK; /*WRITE FIRST RECORD(128 BYTES) TO DISK*/
```

```
      CALL TRMSG;  /* SEND THE FIRST ACK FRAME */
    END;
ELSE
IF RXBUFF(18)=1 THEN /*INTERMEDIATE FILE FRAME*/
    DO;
      CALL WRDISK; /*WRITE NEXT RECORD TO DISK*/
      CALL TRMSG;  /* SEND THE ACK FRAME */
    END;
ELSE
IF RXBUFF(18)=255 THEN /*LAST(DUMMY) FILE FRAME*/
    DO;
      CALL CLOSDF; /*CLOSE THE DISK FILE*/
      PUT SKIP LIST('******* END FILE RECEIPT *******');
      PUT SKIP LIST('   SEE FILE(S):RECFROM_.NET');
      PUT SKIP(2);
      CALL TRMSG;  /*SEND THE LAST ACK */
      PUT SKIP LIST('            NOTE:');
      PUT SKIP LIST('-----------------------------------');
      PUT SKIP LIST('IF RECEIVED FILE IS A TEXT FILE FROM');
      PUT SKIP LIST('THE VAX THEN REFORMAT USING:');
      PUT SKIP LIST(''PIP FNAME.FTYPE=RECFROM_.NET[D80]'');
      PUT SKIP LIST('WHERE FNAME.FTYPE IS YOUR CHOICE');
      PUT SKIP LIST('-----------------------------------');
      PUT SKIP(2);
      IF VTERM=1 THEN
         DO;
           PUT SKIP LIST('STILL IN VAX TERMINAL MODE:');
           PUT SKIP LIST('V>');
         END;
      ELSE
         DO;
           PUT SKIP LIST('IN WAIT LOOP-ENTER<CR> TO EXIT');
           PUT SKIP LIST('*****************************');
           PUT SKIP(2);
         END;
    END;
ELSE
    PUT SKIP LIST(' FRAME TYPE FIELD BYTE 2 INVALID CODE');
END FILER;

END RECDATA; /* ISO LAYER 6 RECEIVE MODULE */
```

APPENDIX K

SOURCE CODE FOR MODULE ETHER2.ASM

```
;*****************************************************************
;*****************************************************************
;*****************************************************************
;
; PROGRAM NAME:ETHER2.ASM
;
; THIS MODULE PERFORMS THE ISO LAYER 2 AND 3 FUNCTIONS IN
; TRANSMIT AND RECEIVE AND PROVIDES THE ISO LAYER 7
; RECEIVE MODULE
;
;       APPLICATION LAYER(LAYER 7):IN RECEIVE ONLY- WAIT LOOP
;       FOR FRAME ARRIVAL.
;
;       NETWORK LAYER(LAYER 3):TRANSMIT OR RECEIVE FRAMES
;
;       DATA LINK LAYER(LAYER 2):PROCESSES ACKNOWLEDGE FRAMES
;       IN ADDITION TO THE LAYER 2 FUNCTIONS PERFORMED BY THE
;       NI3010 CONTROLLER BOARD.
;
;       THIS MODULE ALSO ALLOWS ALL OTHER MODULES TO ACCESS
;       THE CP/M-80 OPERATING SYSTEM FUNCTIONS SHOWN BELOW
;
; LAST REVISION: 09/16/83-1000   ORIGINAL PROGRAM: 08/14/83
; AUTHOR: CAPT MARK D. STOTZER-USMC-AEGIS MODELING GROUP
; THESIS ADVISOR: PROFESSOR UNO R. KODRES-COMPUTER SCIENCE
;
;*****************************************************************
PUBLIC    INIT; SUBROUTINES AVAILABLE TO EXTERNAL MODULES:
PUBLIC    RECEIVE
PUBLIC    FILBUF
PUBLIC    EMTBUF
PUBLIC    NULBUF
PUBLIC    AWAIT
PUBLIC    TRMSG
PUBLIC    WRDISK
PUBLIC    VAXTXT
PUBLIC    SENDFRAM
PUBLIC    RDISK
PUBLIC    OPENDF
PUBLIC    DELEDF
PUBLIC    MAKEDF
PUBLIC    CLOSDF
PUBLIC    RCVDMA; MODULES CALLED BY THIS MODULE
```

```
PUBLIC    TRNDMA
EXTRN     RECDATA
; NI3010 BOARD REGISTER PORT ADDRESSES:
CREG      EQU       00B0H; COMMAND REGISTER
SREG      EQU       00B1H; COMMAND STATUS REGISTER
ISREG     EQU       00B5H; INTERRUPT STATUS REGISTER
IEREG     EQU       00B8H; INTERRUPT ENABLE REGISTER
EBAR      EQU       00B9H; EXTENDED BASE ADDRESS REGISTER
HBAR      EQU       00BAH; HIGH BASE ADDRESS REGISTER
LBAR      EQU       00BBH; LOW BASE ADDRESS REGISTER
HBREG     EQU       00BCH; HIGH BYTE COUNT REGISTER
LBREG     EQU       00BDH; LOW BYTE COUNT REGISTER
;CP/M WARM BOOT ENTRY POINT:
EXIT      EQU       0000H; WARM BOOT-TERMINAL ERROR ESCAPE
;BDOS EQUATES:
BDOS      EQU       0005H; BDOS ENTRY POINT
;BDOS FUNCTION CODES:
CONSIN    EQU       01H; CONSOLE CHARACTER INPUT
CONSOUT   EQU       02H; CONSOLE CHARACTER OUTPUT
PSTRING   EQU       09H; PRINT STRING
CONSTAT   EQU       0BH; CHECK CONSOLE STATUS
OPENFIL   EQU       0FH; OPEN A DISK FILE
CLOSEF    EQU       10H; CLOSE A DISK FILE
DELETE    EQU       13H; DELETE A DISK FILE
READF     EQU       14H; READ A DISK FILE RECORD-128 BYTES
WRITEF    EQU       15H; WRITE A DISK FILE RECORD-128 BYTES
MAKEF     EQU       16H; CREATE A NEW DISK FILE
SDMA      EQU       1AH; SET DISK DMA ADDRESS
;*************************************************************
;*************************************************************
; INIT- INITIALIZES INTERRUPT VECTOR AND NI3010 REGISTERS:
;
INIT      DI
          IN        SREG; READ STATUS REGISTER TO CLEAR
          MVI       A,03FH; CLEAR NI3010 RECEIVE BUFFER
          OUT       CREG
          CALL      READ
          MVI       A,12H; SET UP INTERRUPT CONTROL
          OUT       0FDH
          MVI       A,00H
          OUT       0FCH
          MVI       A,0DFH; ENABLE INT5 ONLY
          OUT       0FCH
          MVI       A,0C3H
          STA       0028H
          LXI       H,RECFRAM
          SHLD      0029H
          LXI       H,ACK
          MVI       A,0FFH; PRELOAD ACKNOWLEDGE BUFFER
          MOV       M,A
          LXI       H,CEREG; ENABLE RECEIVE(RBA) INTERRUPT
```

```
          MVI       A,04H
          MOV       M,A
          CUT       IEREG
          MVI       A,09E; NI3010 ONLINE COMMAND
          OUT       CREG
          CALL      READ
          EI
          RET
;*****************************************************************
;*****************************************************************
; RECEIVE:ISO LAYER 7-WAIT LOOP FOR INCOMING FRAMES:
;
RECEIVE   EI
WAITLP    NOP
          NOP
          NOP
          NOP
          NOP
          DI
          LXI       H,FRAMIN
          MOV       A,M
          CPI       01H; HAS A FRAME ARRIVED?
          JNZ       NOTYET
          CALL      RECDATA
          MVI       A,00H; RESET FRAME ARRIVAL FLAG
          STA       FRAMIN
NOTYET    MVI       C,CONSTAT
          CALL      BDOS
          CPI       00H
          RNZ
          EI
          JMP       WAITLP
;*****************************************************************
;*****************************************************************
; RECFRAM-PERFORMS ISO LEVEL 3 FUNCTION IN THE RECEIVE
;         MODE:RECEIVES FRAMES AND TRANSFERS THEM TO MEMORY.
;         HANDLES ALL NI3010 INTERRUPTS AND ENABLES.
;
RECFRAM   DI
          PUSH      PSW
          PUSH      B
          PUSH      D
          PUSH      H
          LXI       H,CEREG
          MOV       B,M
          MVI       A,00H
          LXI       H,CEREG; DISABLE NI3010 INTERRUPTS
          MOV       M,A
          OUT       IEREG
          MOV       A,B
          MVI       B,04H
```

```
        CMP     B
        JZ      RBA; RECEIVE FRAME INT WAS ENABLED
        MVI     B,07H
        CMP     B
        JZ      RDD; RECEIVE DMA INT WAS ENABLED
        JMP     RDD2; IF TRANSMIT DMA INT WAS ENABLED
RBA     MVI     A,00H
        OUT     EBAR
        LXI     H,RBUFFT; TOP OF RECEIVE BUFFER
        MOV     A,H
        OUT     HBAR
        MOV     A,L
        OUT     LBAR
        LHLD    FRSIZE
        LXI     D,0016H; ADD 22 TO IT
        DAD     D
        MOV     A,H
        OUT     HBREG
        MOV     A,L
        OUT     LBREG
        LXI     H,CEREG
        MVI     A,07H; SET INT ENABLE TO RDD
        MOV     M,A
        OUT     IEREG
        JMP     FINI
RDD     LXI     H,RBUFFT; TOP OF RECEIVE BUFFER
        MOV     A,M
        CPI     00H; TESTS FOR GOOD FRAME
        JNZ     FRERR; BAD RECVD FRAME
        MVI     A,01H; SET FRAME ARRIVED FLAG
        STA     FRAMIN
        LXI     H,RTYPE1; TEST FOR RECVD ACK FRAME
        MOV     A,M
        CPI     00H
        JNZ     RDD2
        LXI     H,RTYPE2
        MOV     A,M
        CPI     0FFH
        JNZ     RDD2
        MVI     A,01H
        STA     ACK; ACK FRAME RECVD
        JMP     RDD2
FRERR   DI
        LXI     H,CEREG
        MVI     A,00H
        MOV     M,A; DISABLE BOARD INTERRUPTS
        CUT     IEREG
        LXI     D,FERMSG0
        CALL    TXTOUT
        LXI     D,TERRMSG
        CALL    TXTOUT
```

```
        JMP     EXIT; ESCAPE TO CPM
RDD2    LXI     H,CEREG
        MVI     A,04H
        MOV     M,A; RESET INT ENABLE TO RBA
        OUT     IEREG
FINI    POP     H
        POP     D
        POP     B
        MVI     A,020H; RESTORE INT PRIORITY
        OUT     0FDH
        POP     PSW
        EI
        RET
;*****************************************************************
;*****************************************************************
; FILBUF-PLACES CONSOLE INPUT MESSAGES INTO TRANSMIT BUFFER
;
FILBUF  LHLD    FRSIZE; LOAD COUNT=FRAME SIZE
        XCHG
        PUSH    D
        LXI     H,TFDATA; LOAD ADDR =TRANSMIT DATA TOP
        PUSH    H
MSGLP   MVI     C,CONSIN; INPUT CONSOLE CHAR.
        CALL    BDOS
        POP     H
        POP     D
        CPI     0DH; WAS CARRIAGE RETURN INPUT?
        JNZ     RDCP
        PUSH    H  ; YES
        LXI     H,VTERM; IN TERMINAL MODE?
        MOV     A,M
        CPI     01H
        JZ      VTEND; THEN THIS IS END OF MSG.
        POP     H
        MOV     M,A; STORE THE CHAR.
        INX     H
        MVI     A,0AH; ADD A LINE FEED
        MOV     M,A; STORE THE LINEFEED TOO
        PUSH    D
        PUSH    H
        MVI     C,CONSOUT; OUTPUT IT TO CONSOLE
        MOV     E,A
        CALL    BDOS
        POP     H
        POP     D
        JMP     RDCON; CONTINUE TO READ THE BUFFER
RDCP    CPI     08H; BACKSPACE=8=CNTL-H
        JZ      BACKSP
        CPI     60H; GRAVE ACCENT=`=END OF MESSAGE
        JZ      SENT
        MOV     M,A; STORE THE CHAR.
```

```
          DCX       D; DECREMENT THE COUNTER
          MOV       A,D
          ORA       E
          JNZ       RDCON; IF CTR NOT ZERO THEN CONTINUE READ
          PUSH      H
          LXI       D,LONGMSG;ERROR MSG:TOO MANY INPUT CHAR.
          CALL      TXTOUT
VTEND     POP       H; TERMINAL MSG IN BUFFER-DONE
          MVI       A,60H
          JMP       SENT
RDCON     PUSH      D; CONTINUE BRANCH
          INX       H
          PUSH      H
          JMP       MSGLP; GET ANOTHER CHAR
BACKSP    INX       D
          PUSH      D
          DCX       H
          PUSH      H
          JMP       MSGLP; GET ANOTHER CHAR
SENT      MOV       M,A; STORE THE CHAR
          PUSH      H
          LXI       D,DADDF; LAST ADDR BYTE
          MOV       A,M
          CPI       07FH; IS VAX =DESTINATION?
          JZ        SENFIN
          POP       H
          MVI       A,00H
          MOV       M,A; SOTRE A NULL IN PLACE OF ACCENT
          CALL      ECLN
          RET
SENFIN    POP       H
          CALL      ECLN
          RET
;*****************************************************************
;*****************************************************************
; EMTBUF-DUMPS RECEIVE BUFFER TO CONSOLE:
;
EMTBUF    LHLD      FRSIZE
          XCHG
          PUSH      D
          LXI       H,RDATAT; TOP OF RECEIVE BUFFER
CONLP     MVI       C,CONSOUT; CHAR TO CONSOLE
          MOV       E,M
          PUSH      H
          CALL      BDOS
          POP       H
          POP       D
          DCX       D
          MOV       A,D
          ORA       E
          JZ        MSGDONE; IF COUNT=FRAME SIZE-DONE
```

```
          PUSH    D
          INX     H
          JMP     CONLP
MSGDONE   CALL    EOLN
          CALL    EOLN
          RET
;*****************************************************************
;*****************************************************************
; VAXTXT-CONVERTS CPM FORMAT TEXT FILES TO VAX FORMAT:
;
VAXTXT    CALL    EOLN
          MVI     C,OPENFIL; OPEN THE DISK FILE
          LXI     D,FCBIN
          CALL    BDOS
          CPI     0FFH; TEST IF OPEN SUCCESSFUL
          JZ      FERR1
          MVI     C,SDMA; SET THE DISK DMA ADDRESS
          LXI     D,TXTTOP
          CALL    BDOS
          LXI     D,TRMSG1
          CALL    TXTOUT
          CALL    EOLN
          LXI     H,TXTTOP; TOP OF TEXT BUFFER
          PUSH    H
          LXI     D,TFDATA; TRANSMIT BUFFER 1ST DATA BYTE
          PUSH    D
          MVI     B,00H; BYTE CTR=0
          PUSH    B
          CALL    NULBUF; FILL TRANSMIT BUFFER WITH 00 HEX
READREC   MVI     C,READF; READ A DISK FILE RECORD=128 BYTES
          LXI     D,FCBIN
          CALL    BDOS
          CPI     00H; IS THIS LAST RECORD?
          JNZ     ENDRD
RDLPA     POP     B
          POP     D
          POP     H
          INR     B; INCREMENT COUNTER
          MOV     A,B
          CPI     081H;=129 LAST BYTE THIS RECORD
          JZ      READ2; GET ANOTHER RECORD
          MOV     A,M
          CPI     0DH; CRET?
          JZ      SKIP2
          CPI     0AH; LFEED?
          JZ      SKIP3
          XCHG
          MOV     M,A
          XCHG
          INX     H
          INX     D
```

```
          PUSH    H
          PUSH    D
          PUSH    B
          JMP     RDLPA
SKIP2     INX     H; IF BYTE=CRET THEN SEND THE FRAME
          PUSH    H
          LXI     D,TFDATA
          PUSH    D
          PUSH    B
          CALL    SENDFRAM; SEND IT
          CALL    NULBUF; NULL THE BUFFER AGAIN
          MVI     A,01H; SET TYPE FIELD=INTERMED FRAME
          STA     TTYP2
          JMP     RDLPA; READ NEXT BYTE AFTER SKIP CRET
SKIP3     INX     H; IF LINEFEED THEN SKIP AND READ MORE
          PUSH    H
          PUSH    D
          PUSH    B
          JMP     RDLPA
READ2     LXI     H,TXTTOP; IF CTR >128 THEN GET RECORD
          PUSH    H
          INX     D
          PUSH    D
          MVI     B,00H; RESET BYTE CTR
          PUSH    B
          JMP     READREC GET THE NEXT RECORD
ENDRD     MVI     A,0FFH
          STA     TTYP2
          POP     B
          POP     D
          POP     H
          CALL    SENDFRAM
          LXI     D,DMSG
          CALL    TXTOUT
          RET               ; DONE
FERR1     LXI     D,ERMSG; ERROR MSG-FILE NOT OPEN
          CALL    TXTOUT
          RET
;*****************************************************************
;*****************************************************************
; ISO LEVEL 3 TRANSMIT FUNCTION-SENDFRAM:
;
; SENDFRAM-SENDS FRAMES ON THE ETHERNET:
;
SENDFRAM DI
LOOP1     LXI      H,CEREG; LOOP UNTIL ENABLE REG= 0 OR 4
          MOV      A,M
          CPI      00H
          JZ       GO
          CPI      04H
          JZ       GO
```

```
        EI
        JMP     LOOP1; KEEP CHECKING
GO      DI
        LXI     H,CEREG
        MOV     A,M
        CPI     00H
        JZ      GO1
        CPI     04H
        JZ      GO1
        EI
        JMP     LOOP1; IF CHANGED GO BACK TO LOOP
GO1     MVI     A,00H
        LXI     H,CEREG; DISABLE NI3010 INTERRUPTS
        MOV     M,A
        OUT     IEREG
        EI
        MVI     A,00H; LOAD TRANSMIT ADDR/BYTE COUNT
        OUT     EBAR
        LXI     H,TBUFFT; TOP OF TRANSMIT BUFFER
        MOV     A,H
        OUT     HBAR
        MOV     A,L
        OUT     LBAR
        LHLD    FRSIZE; SET TRANSMIT FRAME SIZE
        LXI     D,0008H; ADD 9 TO IT
        DAD     D
        MOV     A,H
        OUT     HBREG
        MOV     A,L
        OUT     LBREG
        DI
        MVI     A,06H
        LXI     H,CEREG; ENABLE TRANSMIT(TDD) INTERRUPT
        MOV     M,A
        OUT     IEREG
        EI
        HLT             ; WAIT FOR THE INTERRUPT
COMP    LXI     H,CEREG
        MOV     A,M
        CPI     06H; HAS TDD INTERRUPT ARRIVED?
        JZ      COMP
        DI
        LXI     H,VTERM
        MOV     A,M
        CPI     01H; VIRTUAL TERMINAL MODE?
        JZ      VTCON
        LXI     D,MSG1
        CALL    TXTOUT
VTCON   EI
        MVI     A,029H; NI3010 LOAD TRANSMIT AND SEND CMD.
        DI
```

```
          OUT       CREG
          CALL      TRREAD
          LXI       H,ACK; SET ACK TO SENT
          MVI       A,00H
          MOV       M,A
          EI
          CALL      AWAIT; WAIT FOR ACKNOWLEDGE FRAME
          RET
;*****************************************************************
;*****************************************************************
; ISO LEVEL 2 ROUTINES: AWAIT(TRANSMIT) AND TRMSG(RECEIVE):
;
;*****************************************************************
; AWAIT-WAITS FOR RETURN OF ACKNOWLEDGE FRAMES:
;
AWAIT     LXI       D,0000FH; FIRST TIMER LOOP COUNTER
TRNLP     LXI       B,0FFFFH; INNER LOOP
TRNLP1    LXI       H,ACK
          MOV       A,M
          CPI       01H; RECEIVED ACK YET?
          JZ        BACK
          DCX       B
          MOV       A,C
          ORA       B
          JNZ       TRNLP1
          DCX       D
          MOV       A,E
          ORA       D
          JNZ       TRNLP
          LXI       D,TIMMSG; TIMED OUT-ABORT
          CALL      TXTOUT
          LXI       D,TERRMSG
          CALL      TXTOUT
          JMP       EXIT; ESCAPE TO CPM
BACK      MVI       A,0FFH; RESET ACK FLAG
          STA       ACK
          MVI       A,00H; RESET FRAME ARRIVAL FLAG
          STA       FRAMIN
          RET
;*****************************************************************
; TRMSG-SENDS ACKNOWLEDGE FRAMES IN RECEIVE MODE:
;
TRMSG     MVI       C,03H; CTR=3
          LXI       H,SRCADDD
          LXI       D,DADDD
LOOP2     MOV       A,M
          XCHG
          MOV       M,A
          XCHG
          DCR       C
          JZ        LDCONT
```

```
          INX       H
          INX       D
          JMP       LOOP2
LDCONT    MVI       A,020H; RESET INTERRUPT PRIORITY
          OUT       0FDH
          MVI       A,00H
          OUT       EBAR
          LXI       H,TBUFFT
          MOV       A,H
          OUT       HBAR
          MOV       A,L
          OUT       LBAR
          LHLD      FRSIZE
          LXI       D,0008H
          DAD       D
          MOV       A,H
          OUT       HBREG
          MOV       A,L
          OUT       LBREG
          MVI       A,00H; LOAD TYPE FIELD=ACK FRAME
          STA       TTYP1
          MVI       A,0FFH; ACK FRAME
          STA       TTYP2
          MVI       A,06H; ENABLE TDD INTERRUPT
          LXI       H,CEREG
          MOV       M,A
          OUT       IEREG
          EI
          HLT                 ; WAIT FOR THE INTERRUPT
DONE      LXI       H,CEREG
          MOV       A,M
          CPI       06H; TRANSMIT DMA DONE?
          JZ        DONE
          DI
          MVI       A,029H; LOAD TRANSMIT AND SEND COMMAND
          OUT       CREG
          CALL      TRREAD
          RET
;*****************************************************************
;*****************************************************************
; OPERATING SYSTEM SUBROUTINES:
;
RDISK     MVI       A,00H; READS A DISK FILE RECORD=128 BYTES
          STA       LFRM ; PRELOAD LAST FRAME FLAG
          LXI       D,FCBIN
          MVI       C,READF
          CALL      BDOS
          CPI       00H; =NOT LAST FRAME
          RZ
          MVI       A,01H;=LAST FRAME
          STA       LFRM
```

```
          RET
;*****************************************************************
WRDISK    MVI       C,WRITEF;WRITES DISK FILE RECORD-128BYTES
          LXI       D,FCBOUT
          CALL      BDOS
          CPI       00H
          JNZ       DWERR
          LXI       D,WRMSG
          CALL      TXTOUT
          RET
DWERR     LXI       H,CEREG
          MVI       A,00H; DISABLE BOARD INTERRUPTS
          OUT       IEREG
          LXI       D,DWMSG
          CALL      TXTOUT
          JMP       EXIT; ESCAPE TO CPM
;*****************************************************************
OPENDF    MVI       A,00H; OPENS DISK FILES
          STA       FNOP
          LXI       D,FCBIN
          MVI       C,OPENFIL
          CALL      BDOS
          CPI       0FFH; OPENING ERROR
          RNZ
          MVI       A,01H
          STA       FNOP
          RET
;*****************************************************************
DELEDF    LXI       H,RECFIL; DELETES EXISTING DISK FILES
          MOV       A,M
          INR       A; INCREMENT RECEIVED FILE NUMBER
          STA       RECFIL
          STA       FCBOUT+8
          LXI       D,FCBOUT
          MVI       C,DELETE
          CALL      BDOS
          RET
;*****************************************************************
MAKEDF    LXI       D,FCBOUT; MAKES A NEW DISK FILE
          MVI       C,MAKEF
          CALL      BDOS
          RET
;*****************************************************************
CLOSDF    LXI       D,FCBOUT; CLOSES A DISK FILE
          MVI       C,CLOSEF
          CALL      BDOS
          RET
;*****************************************************************
RCVDMA    LXI       D,RDATAT; SETS DISK DMA FOR RECEIVE MODE
          MVI       C,SDMA
          CALL      BDOS
```

```
          RET
;*****************************************************************
TRNDMA    LXI       D,TFDATA; SETS DISK DMA ADDR FOR TRANSMIT
          MVI       C,SDMA
          CALL      BDOS
          RET
;*****************************************************************
;*****************************************************************
; UTILITY SUBROUTINES:
; READ-READS THE COMMAND STATUS REGISTER AFTER EACH COMMAND:
;
READ      MVI       B,11111110B
          MVI       C,00H
STLP      IN        ISREG
          ORA       B
          CPI       0FFH; STATUS READY TO BE READ?
          JNZ       STLP
          IN        SREG
          CMP       C
          JZ        STDONE
          JMP       ERROR
TRREAD    MVI       B,11111110B
STLP1     IN        ISREG
          ORA       B
          CPI       0FFH
          JNZ       STLP1
          IN        SREG
          CPI       00H
          JZ        STDONE
          CPI       01H
          JZ        STDONE
ERROR     LXI       D,EMSG
          CALL      TXTOUT
STDONE    RET
;*****************************************************************
; TXTOUT-OUTPUTS TEXT STRINGS TO THE CONSOLE:
;
TXTOUT    MVI       C,PSTRING
          CALL      BDOS
          CALL      EOLN
          RET
;*****************************************************************
; EOLN-GENERATES CARRIAGE RETURN + LINE FEED:
;
EOLN      MVI       C,CONSOUT
          MVI       E,0DH
          CALL      BDOS
          MVI       C,CONSOUT
          MVI       E,0AH
          CALL      BDOS
          RET
```

```
;*****************************************************************
; NULBUF-FILLS THE TRANSMIT BUFFER WITH NULLS(00 HEX):
;
NULBUF   MVI      C,0080H; CTR=128
         LXI      H,TFDATA
NULLOOP  MVI      A,00H
         MOV      M,A
         DCR      C
         RZ
         INX      H
         JMP      NULLOOP
;*****************************************************************
;*****************************************************************
; STORAGE ALLOCATION:
;
FRAMIN   DS       1 ; FRAME ARRIVAL FLAG
CEREG    DS       1 ; COPY OF INTERRUPT ENABLE REG VALUE
; NEEDED MESSAGES:
TRMSG1   DB       '****** FILE TRANSFER BEGINS *****$'
DMSG     DB       '****** FILE TRANSFER COMPLETE *****$'
ERMSG    DB       'FILE NOT ON DISK$'
NORESMSG DB       'ON RESPONSE FROM VAX-EXITING TO CPM$'
LONGMSG  DB       'MAX CHARACTER LENGTH REACHED-MSG SENT$'
TERRMSG  DB       'UNRECOVERABLE ERROR-EXITING TO CP/M$'
TIMMSG   DB       'TIMED OUT-ABORTING TRANSMISSION$'
EMSG     DB       'NI3010 COMMAND FAILED$'
MSG1     DB       'TX$'
FERMSG0  DB       'RECEIVED BAD FRAME$'
WRMSG    DB       'RX$'
DWMSG    DB       'DISK WRITE ERROR-DISK FULL$'
COMMON/TXFCB/
FCBIN    DS         36; TRANSMIT FILE CONTROL BLOCK
COMMON/RXFCB/
FCBOUT   DS         36; RECEIVE FILE CONTROL BLOCK
COMMON/TXBUFF/
TBUFFT   DS         1 ; TRANSMIT BUFFER TOP-1ST DEST ADDBYTE
DADDB    DS         1 ; SECOND DEST ADDR BYTE
DADDC    DS         1 ; THIRD DEST ADDR BYTE
DADDD    DS         1 ; FOURTH DEST ADDR BYTE
DADDE    DS         1 ; FIFTH DEST ADDR BYTE
DADDF    DS         1 ; SIXTH DEST ADDR BYTE
TTYP1    DS         1 ; FIRST TYPE FIELD BYTE
TTYP2    DS         1 ; SECOND TYPE FIELD BYTE
TFDATA   DS      1500; DATA FIELD MAX SIZE
COMMON/RXBUFF/
RBUFFT   DS        13; RECEIVE BUFFER TOP-FRAME CHECK BYTE
SRCADDD  DS         1 ; FOURTH SRCE ADDR BYTE
SRCADDE  DS         1 ; FIFTH SRCE ADDR BYTE
SRCADDF  DS         1 ; LAST SRCE ADDR BYTE
RTYPE1   DS         1 ; FIRST RECVD FRAME TYPE FLD BYTE
RTYPE2   DS         1 ; SECOND RECVD TYPE FLD BYTE
```

```
RDATAT    DS       1500; RECVD DATA FIELD MAX SIZE
CRCBYT    DS          4 ; CRC FIELD
COMMON/TXTBUF/
TXTTOP    DS        128; VAX TEXT TEMP BUFFER
COMMON/FRSIZE/
FRSIZE    DS          2 ; ACTUAL FRAME DATA BLOCK SIZE
COMMON/ACK/
ACK       DS          1 ; ACKNOWLEDGE FLAG LOCATION
COMMON/FNOP/
FNOP      DS          1 ; FILE NOT OPEN FLAG
COMMON/LFRM/
LFRM      DS          1 ; LAST FRAME FLAG
COMMON/TRMODE/
TRMODE    DS          1 ; VAX TRANSMIT FLAG
COMMON/FILTYP/
FILTYP    DS          1 ; TYPE OF FILE TO SEND
COMMON/RECFIL/
RECFIL    DS          1 ; RECEIVED FILE NUMBER
COMMON/VTERM/
VTERM     DS          1 ; VIRTUAL TERMINAL SERVICE FLAG
          END; ASSEMBLY LANGUAGE MODULE ETHER2.ASM
;*****************************************************************
;*****************************************************************
;*****************************************************************
```

APPENDIX L

TEST PROGRAM USER INSTRUCTIONS

The Ethernet hardware test programs, ETHTESTA and ETHTESTB, are used in the manner below:

1. Invoke either program using normal CP/M-80 procedures.

2. Both programs first command the NI3010 to run it's built-in diagnostic tests and report failures to the user via the console. The codes that ETHTESTB will display as ASCII letters are encoded as noted at the end of the ETHTESTB.ASM source listing.

3. Next, both programs ask the user to input a short line of text that the programs use in testing the integrity of the essential data paths of the NI3010. Program ETHTESTB will ask the user for a second text line input because it performs one more test than ETHTESTA. The maximum number of characters per line is 42 and the line must be ended with a grave accent: "`".

4. The tests are successful if no error indications are displayed on the console and the text typed in is shown on the console exactly as it was entered after each data path input.

APPENDIX M

COMMUNICATION PROGRAM USER INSTRUCTIONS

The instructions for use of the communication program ETHERNET.COM are as listed below:

1. Invoke the program ETHERNET using normal CP/M-80 procedures.

2. The program will then ask for the selection of:
   A. The disk drive number to write any received files to.
   B. The desired number of data bytes per Ethernet frame.
   C. The network service desired. The choices are:
      1. Send messages or files.
      2. Receive messages or files.
      3. Virtual terminal service with the VAX.
      4. Command file transfers to or from the VAX.
      5. Disconnect from the network.

Depending on which of the above services is requested by the user, the program will do the following:

1. Send a file or message: The program will ask the user to specify which one and, depending on the response, will do the following:
   A. If message sending is selected, the program will:
      1. Ask the user to choose the network address of the destination.
      2. Then ask the user to input the message itself. The maximum message size is determined by the previously selected data block size. The last character entered in order to transmit must be a grave accent character: " ` ".
      3. The message is then sent and upon successful receipt by the destination host the program restarts.
   B. If file sending is selected, the program will:
      1. Ask the user if the file is a text or machine code file.
      2. Ask the user to specify which disk the file is located on.
      3. Ask the user the filename and filetype of the

file.
4. Ask the user to specify the network address of the destination.
5. Upon successful transmission of the entire file the program will restart.

2. Receive a file or message: The program will, upon selection of this mode, wait in a loop for any transmissions addressed to it to arrive. After the receipt of any file or message, the program will return to the wait loop. This feature allows the user to leave the system unattended and then send multiple files and/or messages to it from another network host. The program numbers files in the order they are received beginning with RECFROM0.NET, etc. Text files received from the VAX must be run through the CP/M PIP utility as follows: 'PIP newfilname.filetype=RECFROM_.NET[D80]" which will chop off unneeded characters. The user can exit the wait loop to return to the above menus by entering a carriage return.

3. Terminal service with the VAX 11/780: The program will display a set of instructions to the user concerning the operation of the program in this mode. The user can input text after each V-prompt (V>) appearance. To exit this mode, the user must enter a period (.) followed by a carriage return immediately following any V-prompt (V>). Upon exiting this mode, the program returns to the beginning user menus.

4. Command VAX file transfers: This mode allows the INTELLEC system to command the VAX to either send or receive files by sending it specially coded messages. The procedure is as follows:
   A. Downloading VAX files:
      1. The user must enter the message: "!VAX filename.VAXfiletype/TXT or EXE`"
      2. The specified VAX file will then be sent to the requesting unit.
      3. In the above message, TXT refers to text and EXE refers to machine code files.
      4. After the file receipt is completed, the puser can exit the wait loop by entering a carraige return.
   B. Uploading VAX files:
      1. The user must enter the message: "@VAX filename.VAX filetype/TXT or EXE`"
      2. The above message opens a file by the above filename and filetype on the VAX. The VAX will reply: "Ready for sendfile FN.FT' and the

program will be in the receive wait loop.
3. The user must then enter a carriage return to the beginning of the program and then follow the normal file sending procedures as noted above.

5. Disconnect from the network: Selection of this mode causes the program to return control to the CP/M-80 operating system.

The other features of this program are as follows:

1. Error handling: The below listed transmission or reception errors will cause the program to display error messages and return to CP/M-80:
   A. Receipt of a bad frame.
   B. Receipt of a frame that has an improperly encoded type field.
   C. Acknowledge frame not received by the sending host in a given time frame (Source timed out).
   D. Receipt of a file larger than the disk space remaining (Disk full).

2. Special instructions for IAPX 432 files that must be transferred from the VAX to an INTELLEC system running the Intel ISIS-II operating system:
   A. These special files can only be transferred using the VAX command mode. The VAX/VMS program ETHERNET.EXE must be invoked on the VAX in order for this transfer to be successful.
   B. The procedure is as follows:
      1. After downloading the file to the INTELLEC double density system using ETHERNET.COM and CP/M-80, the user must rename it from the name assigned to it by the receive program to it's original name.
      2. The user must put the CP/M-80 disk in drive A which must have stored on it both the renamed file and the program TOISIS.COM.
      3. The user must then insert an ISIS-II disk into drive B.
      4. The user then, while logged on drive A, must invoke TOISIS filename.filetype. This will convert the program on disk A to the ISIS-II format and store it on disk B.
      5. The user must then remove the CP/M-80 disk in drive A and replace it with the disk from drive B.
      6. The last step is to reboot the INTELLEC system under the ISIS-II operating system and proceed with the IAPX 432 procedures.

LIST OF REFERENCES

1. Tanenbaum, A. S., Computer Networks, Prentice Hall, 1981.

2. Saal, H., "Local Area Networks: An Update on Microcomputers in the Office," Byte, May 1983.

3. Mason, J. and Shaw, G., "Implementing Ethernet from Soup to Nuts," Local Area Network Handbook, ed. Davis, G., McGraw-Hill, 1982.

4. Ross, D. T., Goodenough, J. B., and Irvine, C. A., "Software Engineering: Process, Principles and Goals," IEEE Computer, May 1975.

5. Myers, W., "Toward a Local Area Network Standard," IEEE Micro, August 1982.

6. Xerox Corporation, The Ethernet-A Local Area Network: Data Link Layer and Physical Layer Specifications, September 30, 1980.

7. Interlan Corporation, NI3010 Multibus Communications Controller Users Manual, 1982.

8. Ong, M. M., Protocol Translation and Translators for Heterogeneous Computer Networks, Doctoral Thesis, University of California, Berkeley, California, March 1982.

9. Netniyom, T. P., Design and Implementation of Software Protocol in VAX/VMS Using Ethernet Local Area Network, M. S. Thesis, Naval Postgraduate School, June 1983.

10. Livingston, W. D., "Local Area Network Improves Real Time Intelligence Systems," Defense Electronics, December 1982.

AD-A136 799 A LAYERED COMMUNICATION SYSTEM FOR ETHERNET(U) NAVAL POSTGRADUATE SCHOOL MONTEREY CA M D STOTZER SEP 83 2/2

UNCLASSIFIED F/G 17/2 NL



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

BIBLIOGRAPHY

Digital Research, Link-80 Operators Guide, 1980.

Digital Research, PL/I-80 Applications Guide, 1980.

Digital Research, PL/I-80 Language Manual, 1980.

Hogan, T., Osbourne CP/M User Guide-Second Edition, Osbourne/McGraw-Hill, 1982.

Intel Corporation, Intellec Microcomputer Development System Reference Manual, 1976.

Leventhal, L. A., 8080A-8085 Assembly Language Programming, Osbourne/McGraw-Hill, 1978.

Miller, A. M., Mastering CP/M, Sybex, 1983.

Zaks, R., The CP/M Handbook with MP/M, Sybex, 1980.

INITIAL DISTRIBUTION LIST

1.	Defense Technical Information Center Cameron Station Alexandria, Virginia 22314	2
2.	Library, Code Ø142 Naval Postgraduate School Monterey, California 93943	2
3.	Department Chairman, Code 62 Department of Electrical Engineering Naval Postgraduate School Monterey, California 93943	1
4.	Department Chairman, Code 52 Department of Computer Science Naval Postgraduate School Monterey, California 93943	1
5.	Professor Uno R. Kodres, Code 52Kr Department of Computer Science Naval Postgraduate School Monterey, California 93943	3
6.	Professor Mitchell L. Cotton, Code 62Cn Department of Electrical Engineering Naval Postgraduate School Monterey, California 93943	1
7.	Professor Alex Gerba, Jr., Code 62Gz Department of Electrical Engineering Naval Postgraduate School Monterey, California 93943	1
8.	LtCol. Alan Ross, USAF, Code 52Rs Department of Computer Science Naval Postgraduate School Monterey, California 93943	1
9.	Capt. Brad Mercer, USAF, Code 52Zi Department of Computer Science Naval Postgraduate School Monterey, California 93943	1

10. Capt. Mark D. Stotzer, USMC 1
12802 Greenhall Drive
Woodbridge, Virginia 22192

11. LtCol. J.F. Mullane, USMC, Code 0309 1
United States Marine Corps Representative
Naval Postgraduate School
Monterey, California 93943

12. First Lieutenant Thawip Netniyom, RTA 1
Chulachomkloc Royal Military Academy
Rajadamnurn Avenue
Bangkok, Thailand

13. Capt. Ted F. Rogers, USN 1
Box 327
Lumberport, West Virginia 26386

14. Captain Ioannis A. Karadimitropoulos 1
Delvinou 16
Papagou
Athens, Hellas

15. Mr. Roger H. Stotzer 1
Langston Incorporated
111 Woodcrest Road
Cherry Hill, New Jersey 08034

16. Lieutenant Ioannis K. Kidoniefs, Hellenic Navy 1
SMC 2303
Naval Postgraduate School
Monterey, California 93943

17. Major Anthony K. Sakellaropoulos, Hellenic Air Force 1
SMC 2243
Naval Postgraduate School
Monterey, California 93943

18. Mr. Mike Williams, Code 52 1
Department of Computer Science
Naval Postgraduate School
Monterey, California 93943

19. Daniel Green (Code N20E) 1
Naval Surface Warfare Center
Dahlgren, Virginia 22449

20. Cdr. J. Donegan, USN 1
PMS 400B5
Naval Sea Systems Command
Washington, D. C. 20362

21. Mike McGowan 1
3585 198 Avenue
Aloha, Oregon 97007

22. Dr. M. J. Gralia 1
Applied Physics Laboratory
Johns Hopkins Road
Laurel, Maryland 20707

23. Dana Small 1
Code 8242
NOSC, San Diego, California 92152

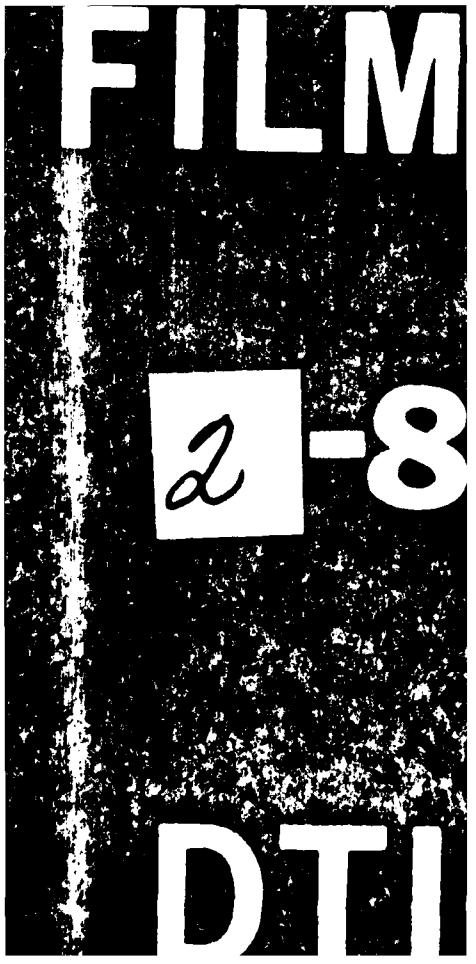
FILM
2-8
DTI